



PCT/AU98/00738

#  
6

REC'D	14 OCT 1998
WFO	PCT

Patent Office  
Canberra

5

I, KIM MARSHALL, MANAGER EXAMINATION SUPPORT AND SALES,  
hereby certify that the annexed is a true copy of the Provisional specification in  
connection with Application No. PO 9080 for a patent by GLENN ROBERT BEALE  
filed on 9 September 1997.

I further certify that the annexed specification is not, as yet, open to public inspection.

PRIORITY DOCUMENT



WITNESS my hand this Sixteenth  
day of September 1998

KIM MARSHALL  
MANAGER EXAMINATION SUPPORT AND  
SALES

P/00/009

Regulation 3.2

AUSTRALIA

Patents Act 1990

**PROVISIONAL SPECIFICATION**

Invention Title:           CONTAINER WITH INTEGRAL HANDLE, PREFORM  
AND METHOD OF MANUFACTURE

The invention is described in the following statement:

Our Ref: 971007

C:\PATENTS\971007.COV

**CONTAINER WITH INTEGRAL HANDLE, PREFORM**  
**AND METHOD OF MANUFACTURE**

**INTRODUCTION**

This invention relates to a container with integral  
5 handle, preform from which the container is biaxially blown  
and a method of manufacture thereof.

**BACKGROUND OF THE INVENTION**

Attempts have been made to incorporate integral  
handles in PET and like injection blow moulded containers -  
10 for example see US 4,629,598 to Thompson, assigned to Tri-  
Tech Systems International, Inc. The parison from which  
the handled bottles of US 4,629,598 are produced is  
illustrated in Fig. 1. To date, however, attempts to  
produce a practical, mass produced version of this  
15 arrangement have been unsuccessful. Instead, the best that  
appears to have been done in commercial practice is an  
arrangement whereby the blown containers are arranged to  
accept a clip on or snap on handle in a separate production  
step after the container itself is formed. See for example  
20 W082/02371 and W082/02370, both to Thompson.

Injection-stretch-blow moulding is a process in which  
the parison is stretched both axially and radially,  
resulting in biaxial orientation.

Biaxial orientation provides increased tensile  
25 strength (top load), less permeation due to tighter  
alignment of the molecules, and improved drop impact,  
clarity, and lightweighting of the container.

Not all thermoplastics can be oriented. The major thermoplastics used are polyethylene terephthalate (PET), polyacrylonitrile (PAN), polyvinyl chloride (PVC), and polypropylene (PP). PET is by far the largest volume material, followed by PVC, PP, and PAN.

The amorphous materials, e.g., PET, with a wide range of thermoplasticity are easier to stretch-blow than the partially crystalline types such as PP. Approximate melt and stretch temperatures to yield maximum container properties are:

	Material	Melt, Degrees C.	Stretch, Degrees C.
	PET	280	107
	PVC	180	120
15	PAN	210	120
	PP	240	160

There are basically two types of processes for stretch-blow moulding: 1) single-stage in which preforms are made and bottles blown on the same machine, and 2) two-stage in which preforms are made on one machine and blown later on another machine.

Single-stage equipment is capable of processing PVC, PET, and PP. Once the parison is formed (either extruded or injection moulded), it passes through conditioning stations which bring it to the proper orientation temperature. The single-stage system allows the process to proceed from raw material to finished product in one machine, but since tooling cannot be easily changed, the process is best suited for dedicated applications and low volumes.

Oriented PVC containers most commonly are made on single-stage, extrusion-type machines. The parison is extruded on either single- or double-head units. Temperature conditioning, stretching, and thread forming

are done in a variety of ways depending on the design of the machine. Many of the processes presently in use are proprietary.

5 Many oriented PET containers are produced on single-stage machines. Preforms are first injection moulded, then transferred to a temperature conditioning station, then to the blow moulding operation where the preforms are stretch-blown into bottles, and finally to an eject station.

10 With the two-stage process, processing parameters for both preform manufacturing and bottle blowing can be optimized. A processor does not have to make compromises for preform design and weight, production rates, and bottle quality as he does on single-stage equipment. He can either make or buy preforms. And if he chooses to make  
15 them, he can do so in one or more locations suitable to his market. Both high-output machines and low output machines are available. Two stage extrusion-type machines generally are used to make oriented PP bottles. In a typical process, preforms are re-extruded, cooled, cut to length,  
20 reheated, stretched while the neck finish is being trimmed, and ejected. The two-stage process is the lowest-cost method to produce oriented PET containers. The two-stage process, which permits injection moulding of the preform and then shipping to blow moulding locations, has allowed  
25 companies to become preform producers and to sell to blow moulding producers. Thus companies that wish to enter the market with oriented PET containers can minimise their capital requirements. Two-stage stretch-blow moulding also is being used for production of oriented PVC containers.  
30 Preform design and its relationship to the final container remains the most critical factor. The proper stretch ratios in the axial and hoop directions must be met if the container is to properly package its intended product.

35	<b>Material</b>	<b>Stretch Ratios</b>	<b>Orientation Temp.Deg.F</b>
	PET	16/1	195-240
	PVC	7/1	210-240
	PAN	9/1	220-260
	PP	6/1	260-280

It is an object of the present invention to produce a practical, readily implementable injection, stretch blow moulded container made from an orientable thermoplastics material incorporating a handle which is formed during and as part of the said injection, stretch blow moulding operation.

#### SUMMARY OF THE INVENTION

According to one aspect of the invention, there is provided a preform for a container comprised of orientable thermoplastic material and arranged so that the resultant blown container will include a handle or like support structure; said preform comprising a moulded structure having a neck portion and an expandable portion below the neck, said neck including a locating ring above the expandable portion and a solid stem of orientable thermoplastics material projecting from the locating ring and moulded integrally therewith which when the container is formed constitutes the handle.

Preferably said stem projects from said locating ring and from a temperature transition zone located immediately below said ring.

According to another aspect of the invention there is provided a method of forming a container having an integral handle; said method comprising:

(a) forming a preform having a neck portion and an expandable portion below the neck portion, said neck portion including a locating ring above the expandable portion and a solid stem of orientable thermoplastics material projecting from the locating ring and moulded integrally therewith, and

(b) performing a blow moulding operation on said preform to expand the expandable portion to form the body of the container.

Preferably said stem projects from said locating ring and from a temperature transition zone located immediately below said ring.

In a preferred form of the invention, the neck portion and integral handle are subjected to a crystallisation step.

5 Preferably, the blow moulding operation includes supporting the stem whilst the preform is blown in a manner whereby at least a portion of the external side of the tube expands to encircle at least a lower portion of the stem so as to form an enclosed grip portion between the external side and the solid stem.

10 It is preferred that the enclosed grip portion allows at least two fingers of the adult human hand to pass therethrough.

In a particularly preferred form of the invention the stem is formed so as to have an I-shaped cross-section at least throughout that portion of the stem where it projects from the external side of said tube. The handle may be curved to provide additional strength.

15 In a further broad form of the invention there is provided a parison for an injection stretch blow moulding process, said parison formed by an injection process including two separate points of injection.

20 Preferably a first point of injection permits injection of non-recycled PET or like thermoplastics material. Preferably a second point of injection permits injection of PET or like thermoplastics material incorporating at least a portion of recycled material.

25 Preferably said first point of injection is for the formation of that part of the parison which will be stretched during a stretch blow moulding operation on the parison. Preferably said second point of injection is for the formation of those parts of said parison which will remain unexpanded or substantially unexpanded in a stretch blow moulding operation on said parison.

30 In yet a further broad form of the invention there is provided a container manufactured from a two stage injection stretch blow moulding process, said container including a graspable handle affixed at at least a first

point and a second point to said container so as to form an enclosed area between the handle and the bottle and through which the fingers of a human hand may be passed.

5 Preferably said first point of connection comprises an integral connection between the handle and the container and is formed in said first step of said two step operation.

Preferably said second point of connection is formed during said second step of said two step operation.

10 Preferably said handle at said second point of interconnection includes a bulbous portion adapted to be at least partially enfolded by a portion of said container as it is blown during said second step of said two step operation whereby a mechanically interlocked connection is  
15 formed at said second point of connection of said handle to said container.

In particular preferred forms said bulbous portion comprises one of an upwardly extending hook, a downwardly extending hook, a bulb or a combination of one or more  
20 thereof.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

Embodiments of the present invention will now be described by way of example, with reference to the accompanying drawings, in which:

25 Fig. 1 is a side view of a prior art parison,  
Fig. 2 is a side view of a parison incorporating features according to embodiments of the present invention,  
Fig. 3 is a partial side elevational view of a blow moulded PET container formed from a preform according to one  
30 embodiment of the invention;  
Fig. 4 illustrates the steps of formation of a parison according to another embodiment of the invention.  
Fig. 5A is a side view of a preform according to a further embodiment of the invention;  
35 Fig. 5B is a side view of a container formed from the preform of Fig. 5A.



Fig. 6 is a side view of a die in open position for manufacture of a preform;  
Fig. 7 is the die of Fig. 6 in closed position;  
Fig. 8 is a side view of the die of Figs. 6 and 7 showing  
5 the stem of the preform located therein,  
Fig. 9 is a top view of a two stage injection, blow mould machine adapted to receive preforms and biaxially orient them into blown containers according to an embodiment of the invention,  
10 Fig. 10 is a side section view of a lifting, lowering and rotating mechanism for handle covers for use with the machine of Fig. 9,  
Fig. 11 is an alternative side section view of the mechanism of Fig. 10,  
15 Fig. 12 is a side section, close up view of the machine of Fig. 9 showing a preform with handle cover lowered over the handle portion thereof,  
Fig. 13A,B illustrates first and second side section views of a preform adapted for loading into the machine of Fig.  
20 9,  
Fig. 14 is a perspective view of the preform of Fig. 13,  
Fig. 15 is a perspective view of a container blown from the preform of Fig. 14 on the machine of Fig. 9,  
Fig. 16 is a plan view of a half mould adapted for blowing  
25 preforms on the machine of Fig. 9,  
Fig. 17 is a top view of the mould of Fig. 16 with a preform inserted therein ready for blowing on the machine of Fig. 9,  
Fig. 18 is a bottom view of Fig. 17 with both half moulds  
30 in opposed relationship,  
Fig. 19 is a further bottom view of Fig. 17 showing the preform in the position of Fig. 17,  
Fig. 20 is a section view through the half mould of Fig. 16,  
35 Fig. 21 is a section view through the mould of Fig. 16,

Fig. 22 is a side view of the container of Fig. 15 blown in the mould of Fig. 19 from a preform as illustrated in Fig. 13 and 14,

Fig. 23 is a detail, side section view of the neck and top handle portion of the container of Fig. 22,

Fig. 24 is a side view of a preform incorporating an enlarged first non-expanding region according to a further embodiment of the invention,

Fig. 25 is an alternative side view of the preform of Fig. 24,

Fig. 26 is a side view of a container blown from the preform of Fig. 24 on the machine of Fig. 9,

Fig. 27 is a perspective view of the preform of Fig. 24,

Fig. 28 is a perspective view of the container of Fig. 26,

Fig. 29 is a side view of yet a further alternative embodiment of a preform incorporating a lengthened or enlarged first non-expanding zone and adapted for blowing on the machine of Fig. 9,

Fig. 30 is a side view of a container blown from the preform of Fig. 29 on the machine of Fig. 9,

Fig. 31 is a plan view of a half mould for blowing the preform of Fig. 24,

Fig. 32 is a plan view of the half mould of Fig. 31 with the preform of Fig. 24 inserted therein ready for blowing on the machine of Fig. 9,

Fig. 33 is a side section view of a container blown in the mould of Fig. 32 and

Fig 34 is a detail side section view of the neck and top handle portion of the container of Fig. 33.

#### **DETAILED DESCRIPTION OF THE DRAWINGS**

A container 10 according to an embodiment of the invention is shown in Fig. 3. It includes a neck 11 and an expanded portion 12.

The neck 11 has a threaded portion 13 and a locating ring 14. Moulded integrally with the ring 14 is a stem 15 having a first portion 15a extending outwardly from the

ring 14 and a second portion 15b so inclined to the first portion 15a that it is nearly parallel to a vertical axis of the container 10. In this instance, the first portion 15a subtends an angle of slightly more than 45° to the wall 20 and the second portion subtends an angle of about 20° to the wall 20.

The particular shape of the stem 15 is selected so that when formed as a handle it may be grasped by fingers of the human hand.

The stem 15 terminates in a stem end 16 which faces generally downwardly in the general direction of closed end of the container 10.

In this instance, the stem 15 is of I-shaped cross-section to combat unwanted effects arising at or near junction 17 of stem 15 with the ring 14 following a blowing operation on the preform 10.

These unwanted effects particularly include stress effects and air inclusions resulting from non-uniform cooling through preform volumes of differing cross-section.

In this embodiment of the invention, the preform is made from PET and is prepared utilizing a heated mould.

In order to produce the container 10, the parison or preform 26 (see Fig. 2) according to an embodiment of the invention can be placed in a blow moulding machine (not shown) and blow moulded according to bi-axial orientation blow moulding techniques with the neck 11 being held in a mould in such a way as not to expand. Initially, the expandable portion of the preform below the neck can be mechanically stretched downwardly to the bottom of the mould and then the bulk of the preform can be blown outwardly by application of compressed air to the extent that a support portion 18 is formed around the stem end 16 such that an enclosed area 19 is formed between wall 20 of the container 10 and the stem 15 in the process of the formation by blow moulding of container 10.

In a particular preferred form of the invention, the enclosed area 19 is of sufficient cross-sectional area to

allow at least two fingers of a human hand to be inserted therethrough and to grasp handle 15 so as to support the container 10.

5 The blow moulding operation is carried out in such a way so as to provide a bottle or container having optimum strength by achieving biaxial orientation of the molecules of the preferred PET material as well as improved barrier properties to reduce oxidation.

10 In accordance with an embodiment of the invention, the neck 11 and handle 15 can be crystallised by over-heating those parts of the preform. The crystallisation of the handle increases its rigidity which assists orientation of the preform and permits the use of less material.

15 Crystallisation of the neck and handle can be carried out by running hot oil over the neck and handle, applying an open flame or by blowing hot air.

20 The location of the handle 15 on the ring 14 ensures that there is minimum interference to the blow moulding process applied to the remainder of the preform. Either a one stage or two stage process can be used.

#### Detailed Description of Further Embodiments

25 Fig. 1 illustrates the prior art preform or parison 21 of US 4,629,598. The concept of this prior art disclosure is to form a handle portion 23 from the locating ring of non-expandable portion 22 of the parison 21.

With reference to Fig. 2 and with reference to the detailed description of the preferred embodiment this arrangement of Fig. 1 is modified according to the present invention in a number of respects.

30 Insets 2A, 2B and 2C show bulbous portions 27 forming part of stem end 16 in the shape, respectively of a downwardly extending hook 24a, a bulb 24b and an upwardly extending hook 24c.

35 These portions have in common a shape which is adapted to engage mechanically with a blown portion of the

container 10 which is adapted to envelop the bulbous portion 27.

5 The process by which the second stage blow of the expandable portion 12 of parison 26 is effected so as to envelope the bulbous portion 27 of stem end 16 is a stretch blow, biaxial orientation process.

10 With reference to Fig. 4 a particular method of manufacture of the parison 26 according to another embodiment of the invention is illustrated. It includes a two stage process for the formation of the parison by an injection moulding process. In Stage 1 a first injection mould inlet 28 permits entry of plastics material for the formation of the expanded portion 12 of the parison 26 (expanded in the blow moulding stage of container  
15 formation, with reference to Fig. 3).

In a second stage of the injection moulding process for the formation of parison 26 a second injection mould inlet 29 permits entry of plastics material for the formation of the non-expandable portion 25 of parison 26.

20 The two stage injection arrangement is such that different plastics materials may be injected through first injection mould inlet 28 and second injection mould inlet 29.

25 In a particular preferred form the plastics material injected in first injection mould inlet 28 is non-recycled or substantially non-recycled plastics material whilst the plastics material injected into second injection mould inlet 29 is recycled or at least partially recycled plastics material.

30 This arrangement permits controlled use of proportions of recycled and non-recycled plastics material in order to achieve optimum economics in the construction of parison 26.

35 In a modification of this arrangement the Stage 2 step can include the production of two walls in the non-expandable portion 25 comprising inner wall 51 and outer wall 52. Inner wall 51 is made from virgin or non-

contaminated PET material and acts as an insulation barrier with respect to wall 52 which can be made from recycled material 52. This dual wall arrangement can be produced by use of a sliding core arrangement as a modification in the die arrangement and process described with reference to Figs. 6, 7 and 8 later in this specification.

Of course the Stage 1 and Stage 2 steps of Fig. 4 can be interchanged in order.

A parison and resulting container according to a further embodiment of the invention are illustrated in Figs. 5A and B respectively. Like parts are numbered as for previous embodiments.

In this embodiment the parison 21 includes a locating ring 14 immediately below which is a first non-expanding region 30 and a second non-expanding region 31. The first non-expanding region 30 may itself be formed so as to be slightly raised or otherwise differentiated from the expandable portion of parison 21. Second non-expanding region 31 may not be differentiated from the expandable portion of parison 21 but, in use, the blowing operation will be such as to ensure that the second non-expanding region 31 is not expanded in the blowing process.

In this case the stem 15 includes a first rib 32 integrally moulded with and extending from locating ring 14. The stem 15 also includes second rib 33 integrally moulded with and extending from second non-expanding region 31. Stem 15 further includes a rib connector 34 integrally moulded with and extending from first non-expanding region 30 and forming a continuous connection between first rib 32 and second rib 33 throughout the length of stem 15.

The parison 36 of Fig. 5A is then blown in the manner previously described to form the volume 35 of container 37 illustrated in Fig. 5B. The neck portion including stem 15, ring 14, first non-expanding region 30 and second non-expanding region 31 remain unexpanded whilst the expandable portion 36 of parison 36 is biaxially stretched to form the major volume 35 of container 37. The stem end 16 may

include the bulbous portions according to the previously described embodiments for connection to container 37 or, either alternatively or in addition can include the application of an adhesive material whereby a chemical bond is formed between stem end 16 and the wall of container 37 by the use of a chemical intermediary.

In a modification of the embodiments of Fig. 5A and Fig. 5B first non-expanding region 30 and second non-expanding region 31 can form part of a single non-expanding region.

In yet a further modification second non-expanding region 31 can be located in the temperature transition zone of the container and wherein minor expansion during the blow moulding step may take place.

In yet a further modification both first non-expanding region 30 and second non-expanding region 31 may be located in the temperature transition zone immediately below the locating ring 14 and, again, minor expansion of these regions may take place during blowing.

With respect to the last two variations described advantage is taken of the observation that expansion at the temperature transition zone can be limited by appropriate mould design and process control whereby unwanted distortion effects caused by the rigid interconnection of this temperature transition zone 30, 31 via second rib 33 and rib connector 34 to ring 14 (or other non-expanding portion of the neck 11) can be controlled.

In use preforms and containers blown therefrom can be manufactured as follows:

A preform is formed from orientable thermoplastics material, preferably PET or like material in an injection moulding process. Slidable dies are illustrated in Figs. 6, 7 and 8 and include a sliding core 40, sliding blocks 41, body 42, base 43, push block 44 and splits holder 45. Fig. 6 illustrates the die in open position, Fig. 7 illustrates the die in closed position and Fig. 8

illustrates a side view showing accommodation of the stem 14.

5 The completed preforms in a second and preferably separate step are subsequently passed to a stretch blow mould machine where the preforms are first reheated to the appropriate transition temperature (refer introduction). The non-expandable portion of the preform including locating ring 14 and stem 15 are shielded substantially from the reheat process by appropriate guarding. In most instances there is likely to be a temperature transition zone in the region 30, 31 described with reference to Figs. 10 5A, 5B.

15 The reheated preform is then placed in a mould and biaxially stretched and the expandable portion blown to full size utilising processes known in the art. During this process the preform is supported at neck 14 and may also be supported at stem 15. Stem 15 does not take part in the blow process although its stem end 16 may be partially enveloped by an external wall of the blown container. 20

#### **DETAILED DESCRIPTION OF METHODS OF MANUFACTURE INCORPORATING MODIFIED TWO STAGE STRETCH BLOW MOULDING MACHINES**

25 Fig. 9 illustrates a modified two stage stretch blow mould machine 110 adapted to stretch blow mould (including biaxial orientation) of the preforms of previous embodiments and preforms of further embodiments to be described below with reference to later figures.

30 The machine 110 comprises a first carousel 111 adapted to receive integral handle preforms 112 from inclined chute 113 into apertures 114 spaced around the periphery thereof.

35 As first carousel 111 rotates it moves, via apertures 114 the preforms 112 from the chute 113 to a second carousel loading position where the preform 112 is transferred to a spindle 115 mounted near the periphery of second carousel 116.



A sector of approximately 270° of second carousel 116 is arranged as a preheating tunnel 117 where the preforms 112 are progressively heated by a heating bank mounted in opposed relationship to the path of travel of the preforms.

5       The suitably preheated preforms 112 are loaded consecutively into apertures 119 of a third carousel 120 which acts as a transfer mechanism to both suitably orient the preforms 112 about their longitudinal axis and present them to a mould cavity 121 comprising first half mould 122 and second half mould 123.

10       It should be noted that during their time in the preheating tunnel 117 the preforms 112 are rotated about their longitudinal axis by spindles 115 and have a handle shroud 124 mounted over the preform stem which subsequently  
15       forms a handle for blown container 125. Details of the rotation of spindles 115 and the shrouding of the preform stem are discussed more fully with reference to Figs. 10, 11 and 12.

20       Mould cavities 121 are mounted on the periphery of a fourth carousel 126. During their travel through approximately a 270° sector the half moulds 122, 123 rotate to a closed position about their axis 127 and, whilst closed, the preform 112 enclosed therein is blown and biaxially stretched in known manner in order to produce an  
25       integral handle, blown container 125. This container 125 is ejected as illustrated when the half moulds open preparatory to receiving a fresh, preheated preform 112.

30       With reference to Fig. 10 further detail is shown of spindles 115 and handle shrouds 124 and their manner of operation upon and in relation to preforms 112 whilst passing through preheating tunnel 117 on second carousel 116.

35       The spindles 15 are rotated by band drive 128 so as to, in one embodiment, rotate the preforms 112 through approximately four full axial rotations during their passage through the preheating tunnel 117.

Whilst in the preheating tunnel 117 a handle shroud 124 is lowered over the free end 129 of handle stem 130 so as to fully shroud the handle stem 130 as best seen in greater detail in Fig. 12.

5       The shroud 124, in one preferred form, is cylindrical save for a fluted open mouth 131 best seen in Fig. 12. The fluted mouth 131 assists in ensuring maximal shrouding of handle stem 130 and also assists in guiding the shroud 124 onto the free end 129 of stem 130.

10       Lifting and lowering of the shroud 124 is effected through a shroud support stem 132 which is suspended from a cam follower 133 adapted to travel on cam 134.

15       The stems 132 are themselves rotated by band drive 135 so as to follow the rotation of spindles 115. As best seen in end view of Fig. 11 the shroud support stem 132 is offset from the cam follower stem 136 by virtue of being mounted near the periphery of platten 137.

20       As cam follower 133 rides up cam 134 it pulls handle shroud 124 up with it by virtue of the connecting link comprising shroud support stem 132, platten 137 and cam follower stem 136.

      Cam follower stem 136 can comprise a telescoped arrangement allowing relative axial rotation between two component, telescoping parts thereof.

25       The handle shroud 124 can comprise alternative shapes other than cylindrical, for example an oval cross section is possible although the cylindrical arrangement having a circular cross section is preferred.

30       The handle shroud 124 is preferably made of insulating material such as a ceramic material and is covered on an exterior surface 138, in a preferred version, with a heat reflecting material which, ideally, is also light reflecting.

35       In use the reflective surface 138 causes light and heat emanating from heating bank 118 to be reflected thereof whereby two functions are performed. The first function involves protecting the handle stem 130 from heat.

The second function is to reflect heat and light in the direction of that portion of the preform closest to the handle stem 130 so that it is evenly heated and tends not to be shadowed by the stem 130.

5        In one particular form the handle shrouds 124 can be cooled by an air or nitrogen blast (not shown) directed at them whilst they are lifted clear of the preform 112. This will assist to prevent radiated and/or convected heat building up within the cavity 139 of the shroud 124.

10       Figs 13-23 illustrate details of a preform, mould and container blown therefrom and therein by the machine of Fig. 9. With reference to Fig. 13, in a preferred version, dimension A is greater than dimension B thereby to discourage tangling of preforms prior to loading into chute  
15       113.

      It will be observed that the top end of the handle is located close to the locating ring in this version. It will also be noted that the stem of the preform which subsequently constitutes the handle of the blown container  
20       is fully supported within the half mould during the entire blowing process. In contrast the walls of the container including portions of the container wall peripherally opposite the top end of the handle stem are free to be blown within the constraints of the mould.

25       With reference to Figs. 24-34 a second version of a preform, mould and resulting blown container is illustrated wherein first non-expanding region 30 is relatively long in the axial direction including a portion 140 which extends from locating ring 141 down to and around at least a top  
30       portion of the connection of the handle stem 130 thereby forming a join of the top end of handle stem 130 to locating ring 141. (Best seen in Fig. 24).

      In this version there is at least partial expansion of wall portions of the preform located peripherally away from  
35       the join of the handle stem 130 to the preform 112 (best seen in Figs 32 and 34). This expansion, relatively, is not as great as the biaxial expansion occurring below the

first and second non-expanding regions 30, 31. It can, however, be significant in providing strength and resistance to gas permeation in at least second non-expanding region 31, if not non-expanding region 30.

5       The above describes only some embodiments of the present invention and modifications obvious to those skilled in the art can be made thereto without departing from the scope and spirit of the present invention.

#### **INDUSTRIAL APPLICABILITY**

10       Embodiments of the invention are applicable to the manufacture of containers made from orientable thermoplastics material and incorporating a handle or like grasping fixture as an integral component of the container.

**CLAIMS**

1. A preform for a container comprised of orientable thermoplastic material and arranged so that the resultant blown container will include a handle or like support structure; said preform comprising a moulded structure having a neck portion and an expandable portion below the neck, said neck including a locating ring above the expandable portion and a solid stem of orientable thermoplastics material projecting from the locating ring and moulded integrally therewith which when the container is formed constitutes the handle.
2. A method of forming a container having an integral handle; said method comprising:
  - (a) forming a preform having a neck portion and an expandable portion below the neck portion, said neck portion including a locating ring above the expandable portion and a solid stem of orientable thermoplastics material projecting from the locating ring and moulded integrally therewith, and
  - (b) performing a blow moulding operation on said preform to expand the expandable portion to form the body of the container.
3. The method of claim 2 wherein the neck portion and integral handle are subjected to a crystallisation step.
4. The method of claim 2 wherein the blow moulding operation includes supporting the stem whilst the preform is blown in a manner whereby at least a portion of the external side of the tube expands to encircle at least a lower portion of the stem so as to form an enclosed grip portion between the external side and the solid stem.
5. The method of claim 4 wherein the enclosed grip portion allows at least two fingers of the adult human hand to pass therethrough.

6. The method of claim 2 wherein the stem is formed so as to have an I-shaped cross-section at least throughout that portion of the stem where it projects from the external side of said tube.
7. A parison for an injection stretch blow moulding process, said parison formed by an injection process including two separate points of injection.
8. The parison of claim 7 wherein a first point of injection permits injection of non-recycled PET or like thermoplastics material.
9. The parison of claim 7 or 8 wherein a second point of injection permits injection of PET or like thermoplastics material incorporating at least a portion of recycled material.
10. The parison of claim 7 or 8 wherein said first point of injection is for the formation of that part of the parison which will be stretched during a stretch blow moulding operation on the parison.
11. The parison of claim 9 wherein said second point of injection is for the formation of those parts of said parison which will remain unexpanded or substantially unexpanded in a stretch blow moulding operation on said parison.
12. A container manufactured from a two stage injection stretch blow moulding process, said container including a graspable handle affixed at at least a first point and a second point to said container so as to form an enclosed area between the handle and the bottle and through which the fingers of a human hand may be passed.
13. The container of claim 12 wherein said first point of connection comprises an integral connection between the handle and the container and is formed in said first step of said two step operation.
14. The container of claim 13 wherein said second point of connection is formed during said second step of said two step operation.

15. The container of claim 14 wherein said handle at said second point of interconnection includes a bulbous portion adapted to be at least partially enfolded by a portion of said container as it is blown during said second step of said two step operation whereby a mechanically interlocked connection is formed at said second point of connection of said handle to said container.
16. The container of claim 15 wherein said bulbous portion comprises one of an upwardly extending hook, a downwardly extending hook, a bulb or a combination of one or more thereof.
17. The container of any one of claims 12 to 16 wherein an adhesive is utilised to assist connection at said second point of interconnection.
18. The preform of Claim 1 further including a locating ring immediately below which is a first non-expanding region and a second non-expanding region.
19. The preform of Claim 18 wherein the first non-expanding region is formed so as to be slightly raised or otherwise differentiated from the expandable portion of parison.
20. The preform of Claim 18 or 19 wherein the second non-expanding region is not differentiated from the expandable portion of parison.
21. The preform of any one of Claims 18-20 wherein the stem includes a first rib integrally moulded with and extending from locating ring.
22. The preform of Claim 21 which also includes a second rib integrally moulded with and extending from said second non-expanding region.
23. The preform of Claim 22 which further includes a rib connector integrally moulded with and extending from first non-expanding region and forming a continuous connection between said first rib and said second rib throughout the length of said stem.


24. The preform of any one of Claims 18-23 and wherein said second non-expanding region forms part of a temperature transition zone.
25. The preform of any one of Claims 18-24 and wherein said first non-expanding region forms part of said temperature transition zone.
26. The preform of Claim 24 or Claim 25 wherein deformation of said temperature transition zone takes place during a stretch blow moulding process.
27. The preform of any one of Claims 18-26 manufactured by a two stage injection moulding process wherein material is injected at different locations in the die to form a preform adapted to be composed from more than one type of material.
28. The preform of Claim 27 wherein during at least one stage of said two stage process an inner wall and outer wall of said preform is formed, said inner wall adapted to be made from a different material from said outer wall.
29. A container stretch blow moulded from the preform of any one of claims 18-28.
30. A container made from PET material and stretch blow moulded from the preform of any one of Claims 18-29.
31. A container comprised of biaxially orientable thermoplastic material manufactured from a two stage injection stretch blow moulding process, said container including a graspable handle affixed at at least a first point and a second point to said container so as to form an enclosed area between the handle and the bottle and through which the fingers of a human hand may be passed.
32. The container of claim 31 wherein said first point comprises an integral connection between the handle and the container and is formed in said first step of said two step operation.
33. The container of claim 31 or claim 32 wherein said second point of connection is formed during said second step of said two step operation.



34. The container of claim 33 wherein said handle at said second point of interconnection includes a bulbous portion adapted to be at least partially enfolded by a portion of said container as it is blown during said second step of said two step operation whereby a mechanically interlocked connection is formed at said second point of connection of said handle to said container.
35. The container of claim 34 wherein said bulbous portion comprises one of an upwardly extending hook, a downwardly extending hook, a bulb or a combination of one or more thereof.
36. The container of any one of claims 31 to 35 wherein an adhesive is utilised to assist connection at said second point of interconnection.
37. The container of any one of claims 31 to 36 further including a locating ring at a neck portion thereof immediately below which is a first non-expanding region.
38. The container of claim 37 further including a second non-expanding region below said locating ring.
39. The container of Claim 37 or Claim 38 wherein the first non-expanding region is formed so as to be slightly raised or otherwise differentiated from the expandable portion of parison.
40. The container of Claim 37 or Claim 38 wherein the second non-expanding region is not differentiated from the expandable portion of parison.
41. The container of any one of Claims 31-40 wherein said handle includes a first rib integrally moulded with and extending from said locating ring.
42. The container of Claim 41 wherein said handle includes a second rib integrally moulded with and extending from said second non-expanding region.
43. The container of Claim 41 or Claim 42 which further includes a rib connector integrally moulded with and extending from said first non-expanding region and forming a continuous connection between said first rib

and said second rib throughout the length of said handle.

44. The container of any one of Claims 31-43 and wherein said second non-expanding region forms part of a temperature transition zone.
45. The container of any one of Claims 31-44 and wherein said first non-expanding region forms part of said temperature transition zone.
46. The container of any one of Claims 31-45 wherein deformation of said temperature transition zone takes place during a stretch blow moulding process.
47. The container of any one of Claims 31-46 manufactured by a two stage injection moulding process wherein material is injected at different locations whereby said container is composed from more than one type of material.
48. The container of Claim 47 wherein during at least one stage of said two stage process an inner wall and outer wall of said preform is formed, said inner wall adapted to be made from a different material from said outer wall.
49. A method of production of an integral handle PET container including the step of shrouding a handle stem portion of a preform during preheating of said preform preparatory to a stretch blow moulding step.
50. The method of Claim 49 wherein the handle stem is fully supported in a mould cavity against movement during the stretch blow moulding operation.

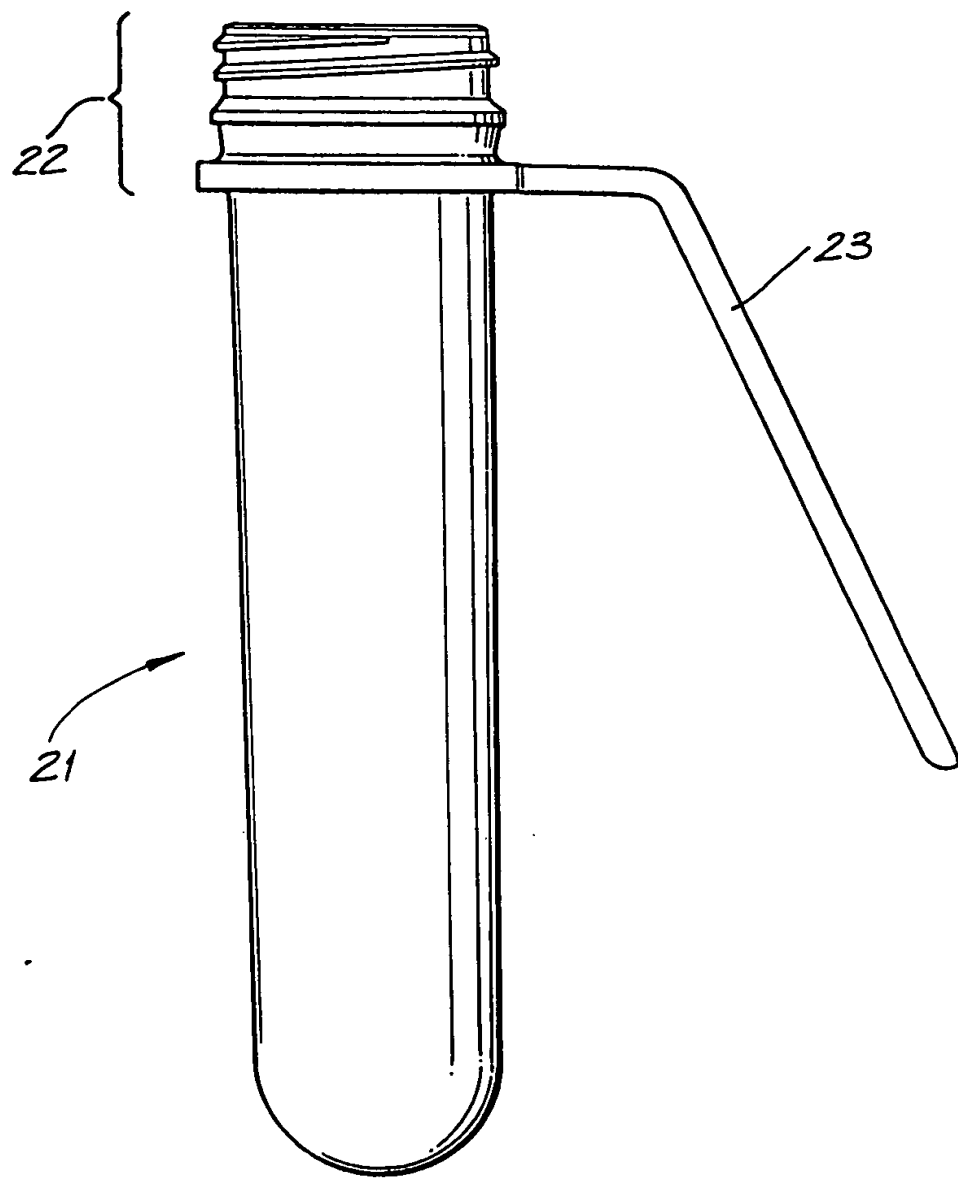

**FIG. 1**  
PRIOR ART

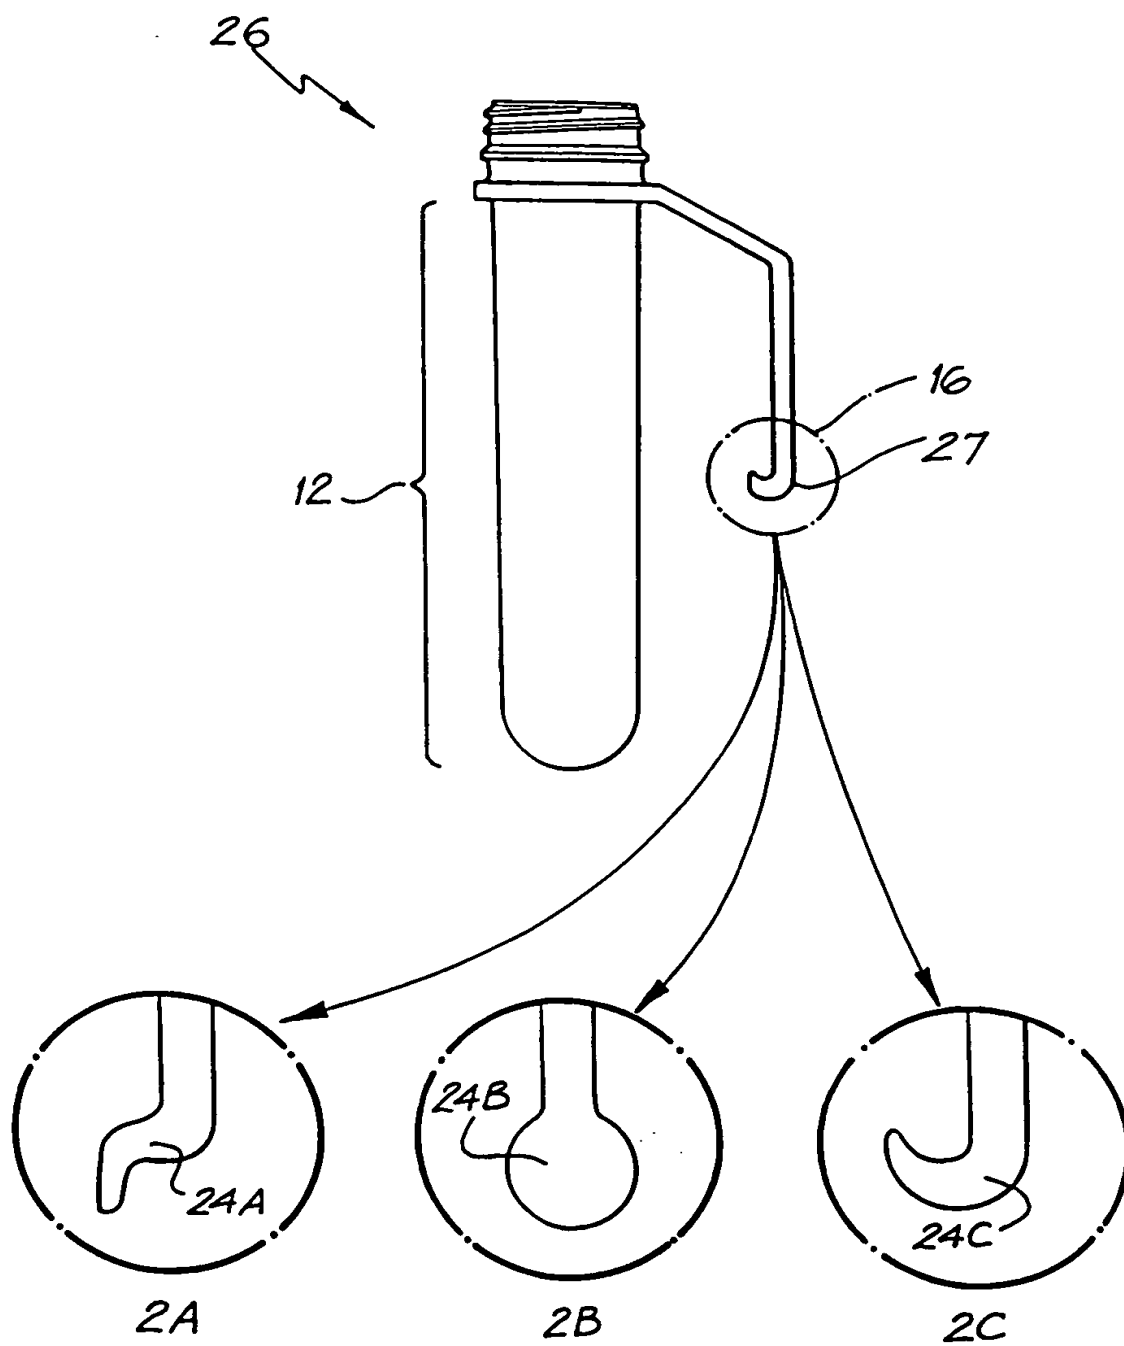


FIG. 2

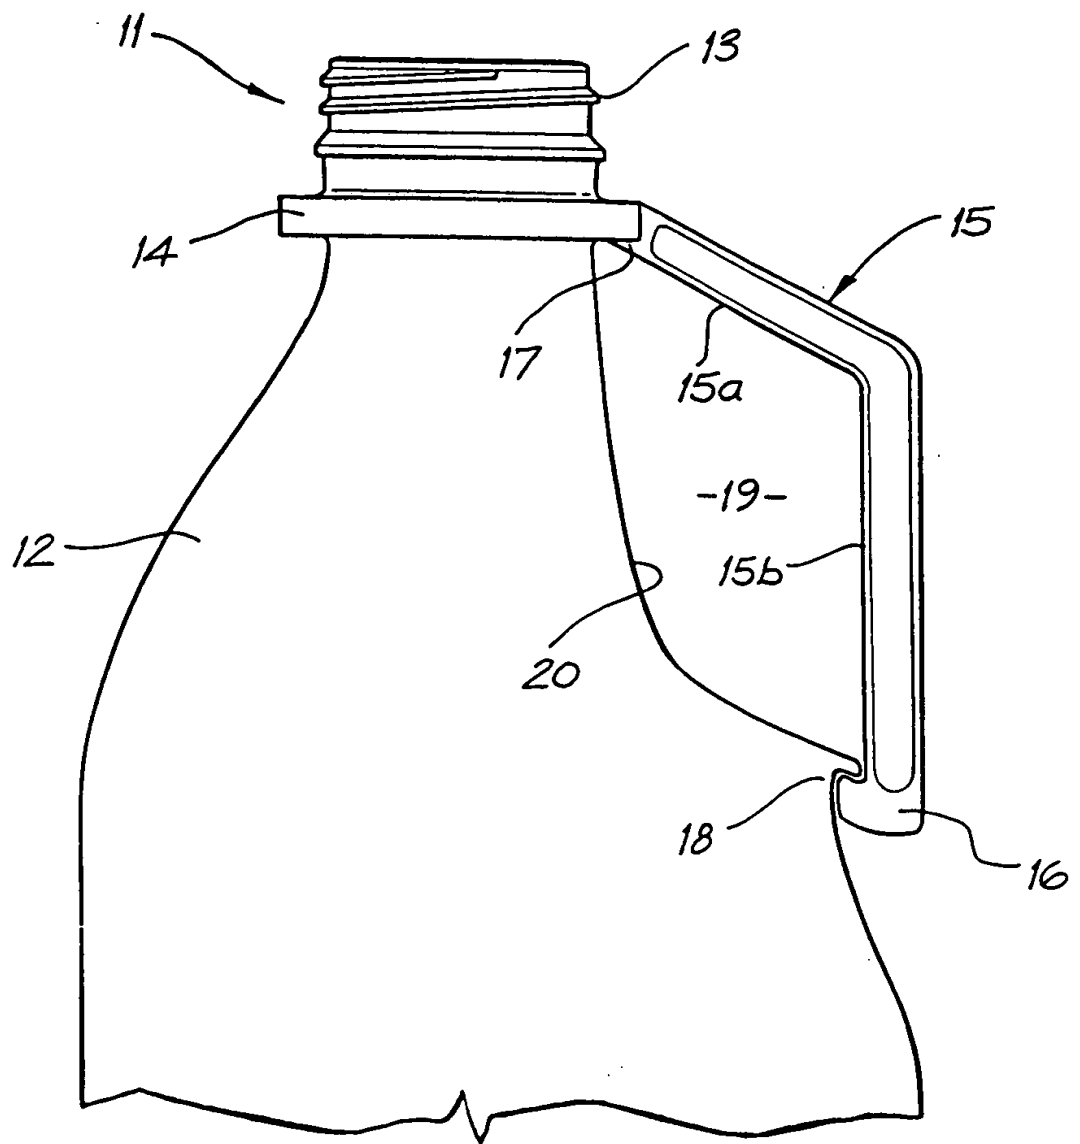
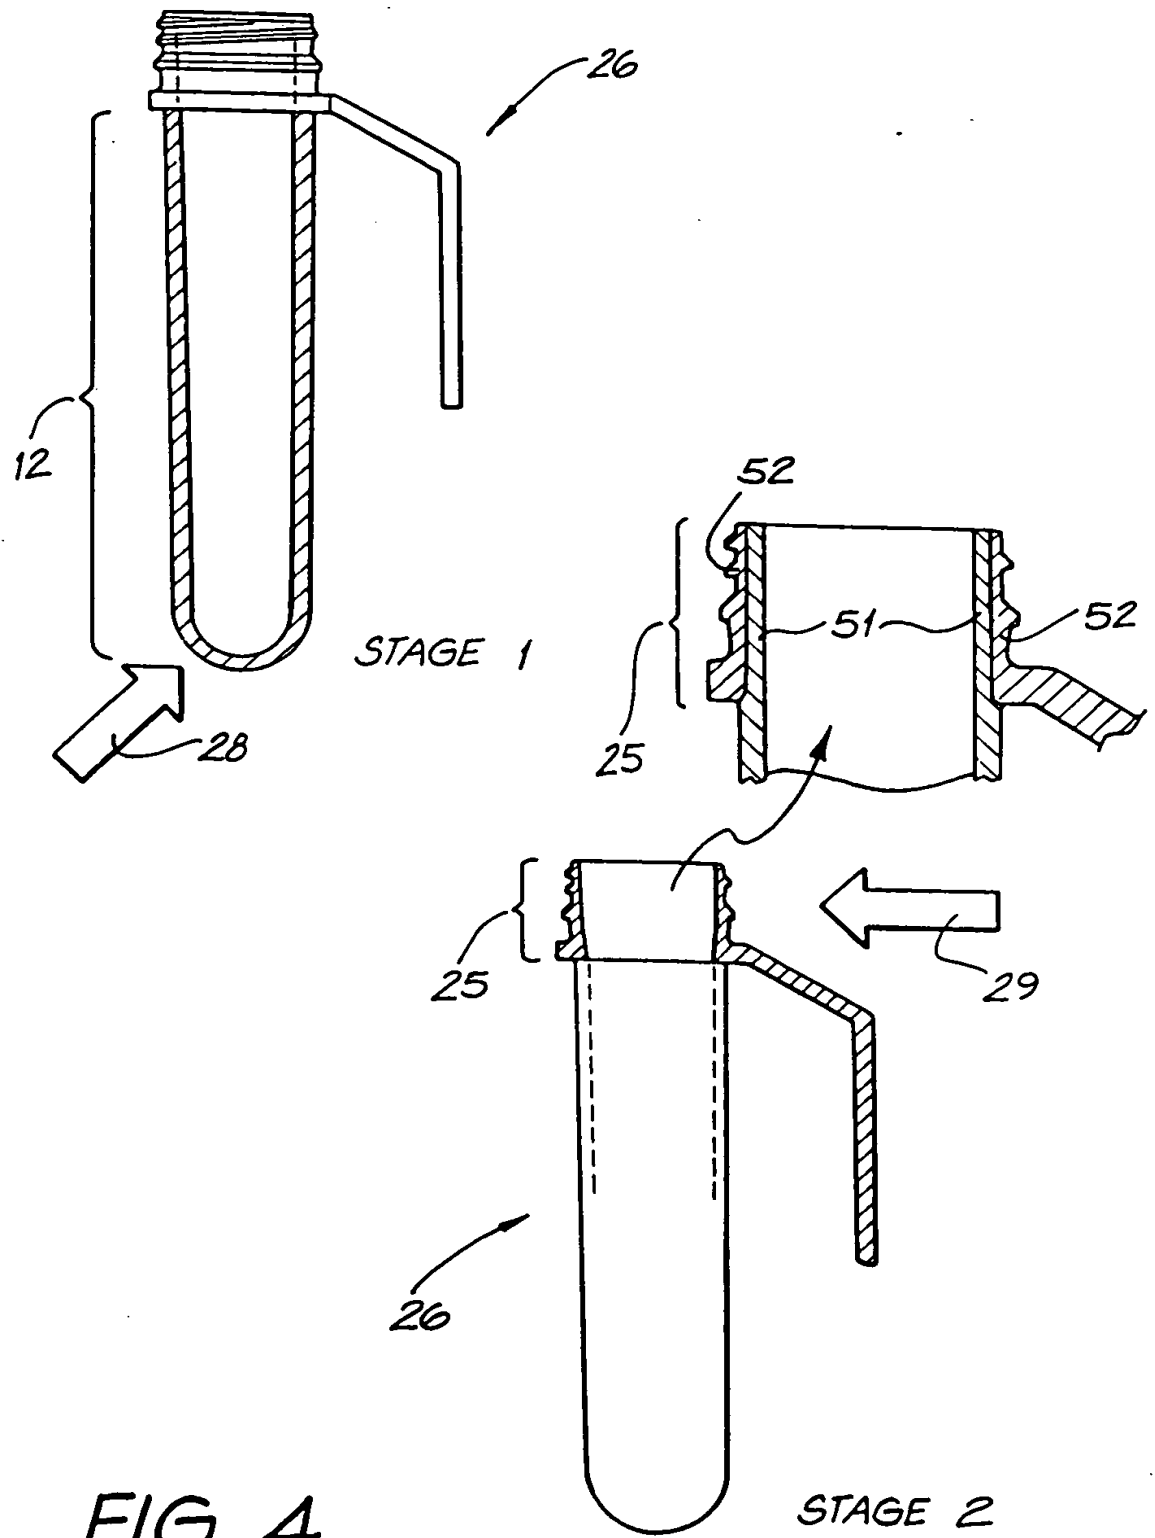


FIG. 3



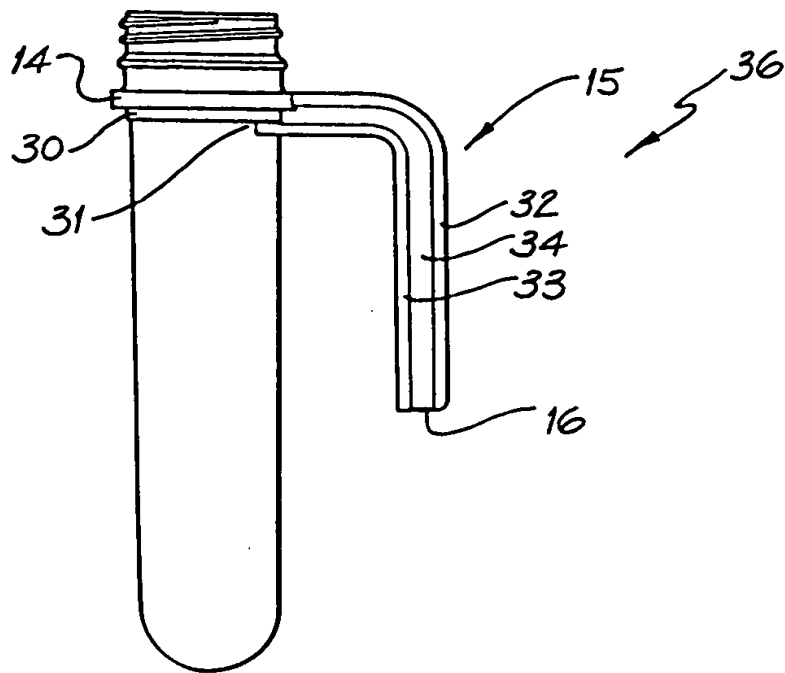


FIG. 5A

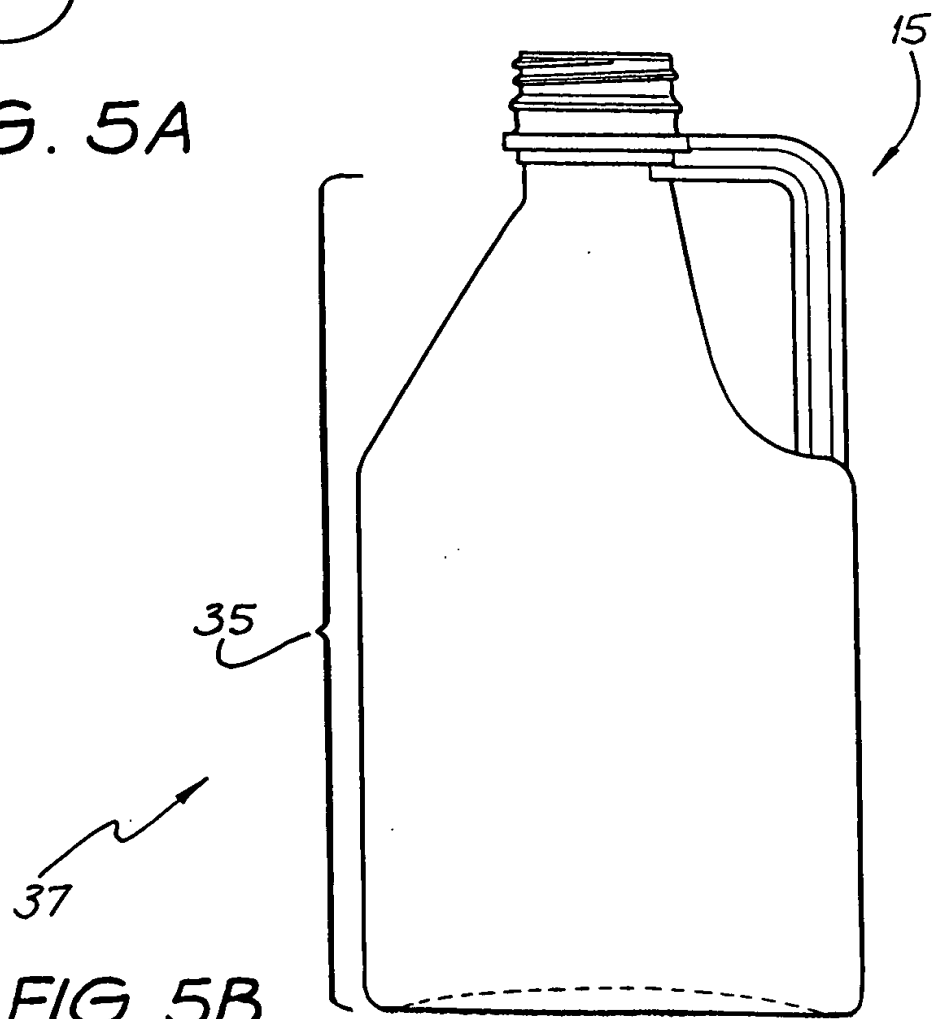


FIG. 5B

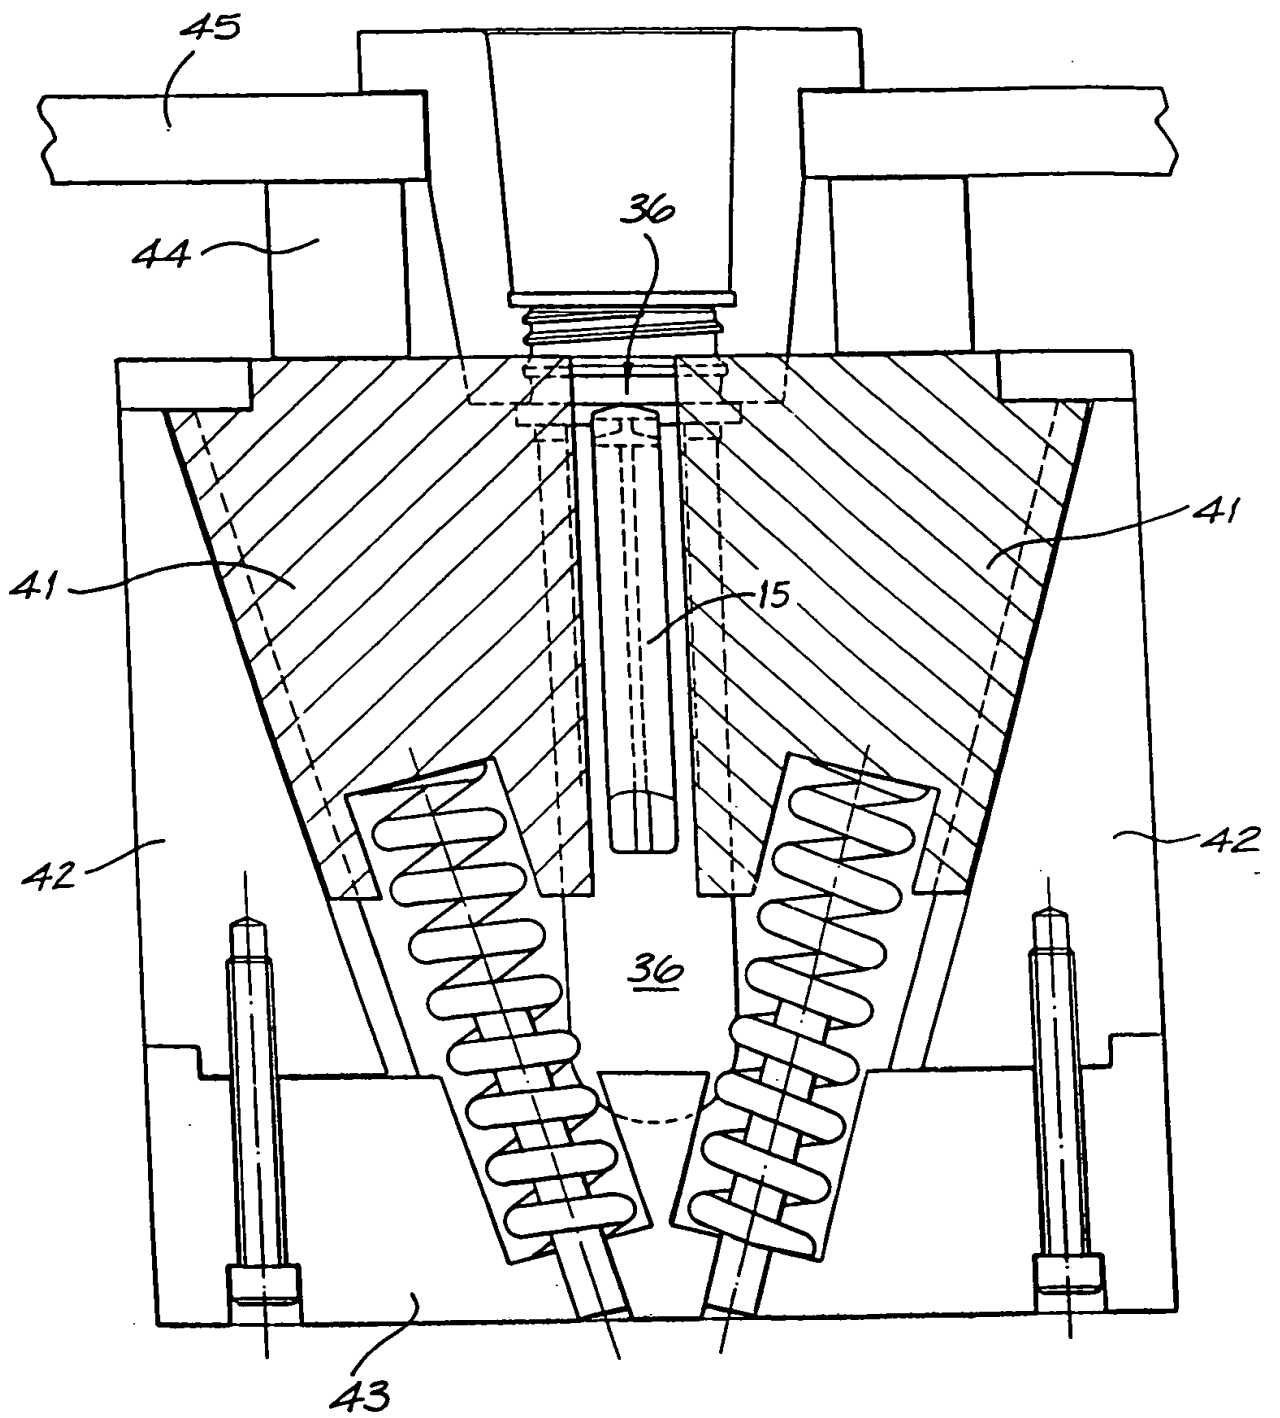


FIG. 6



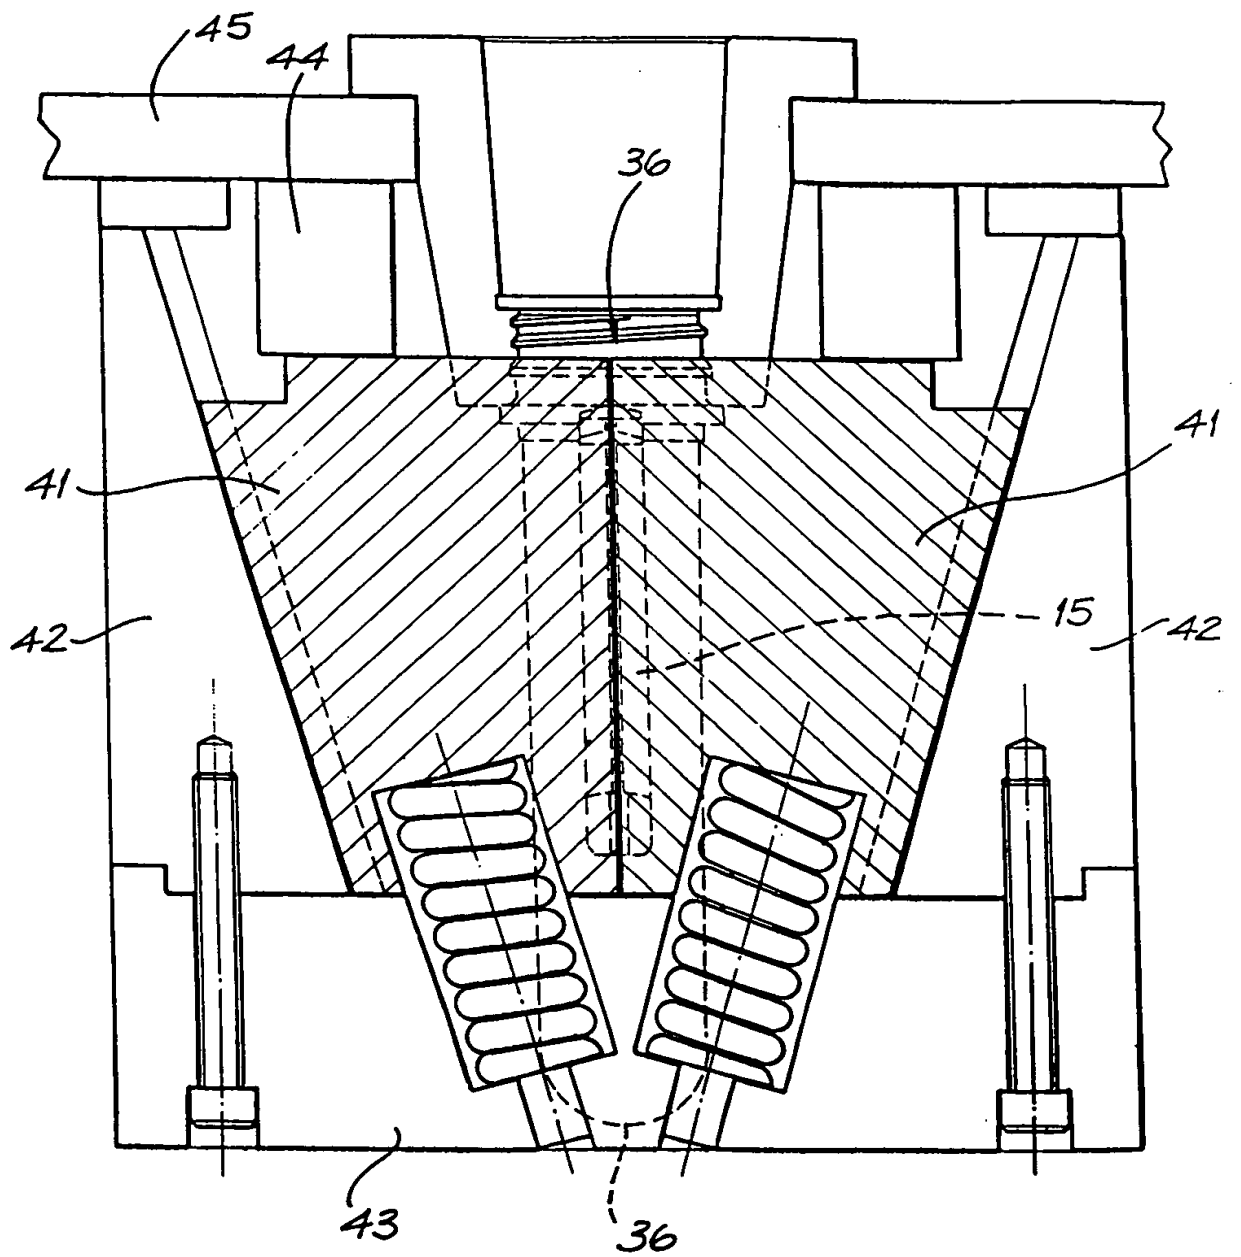


FIG. 7

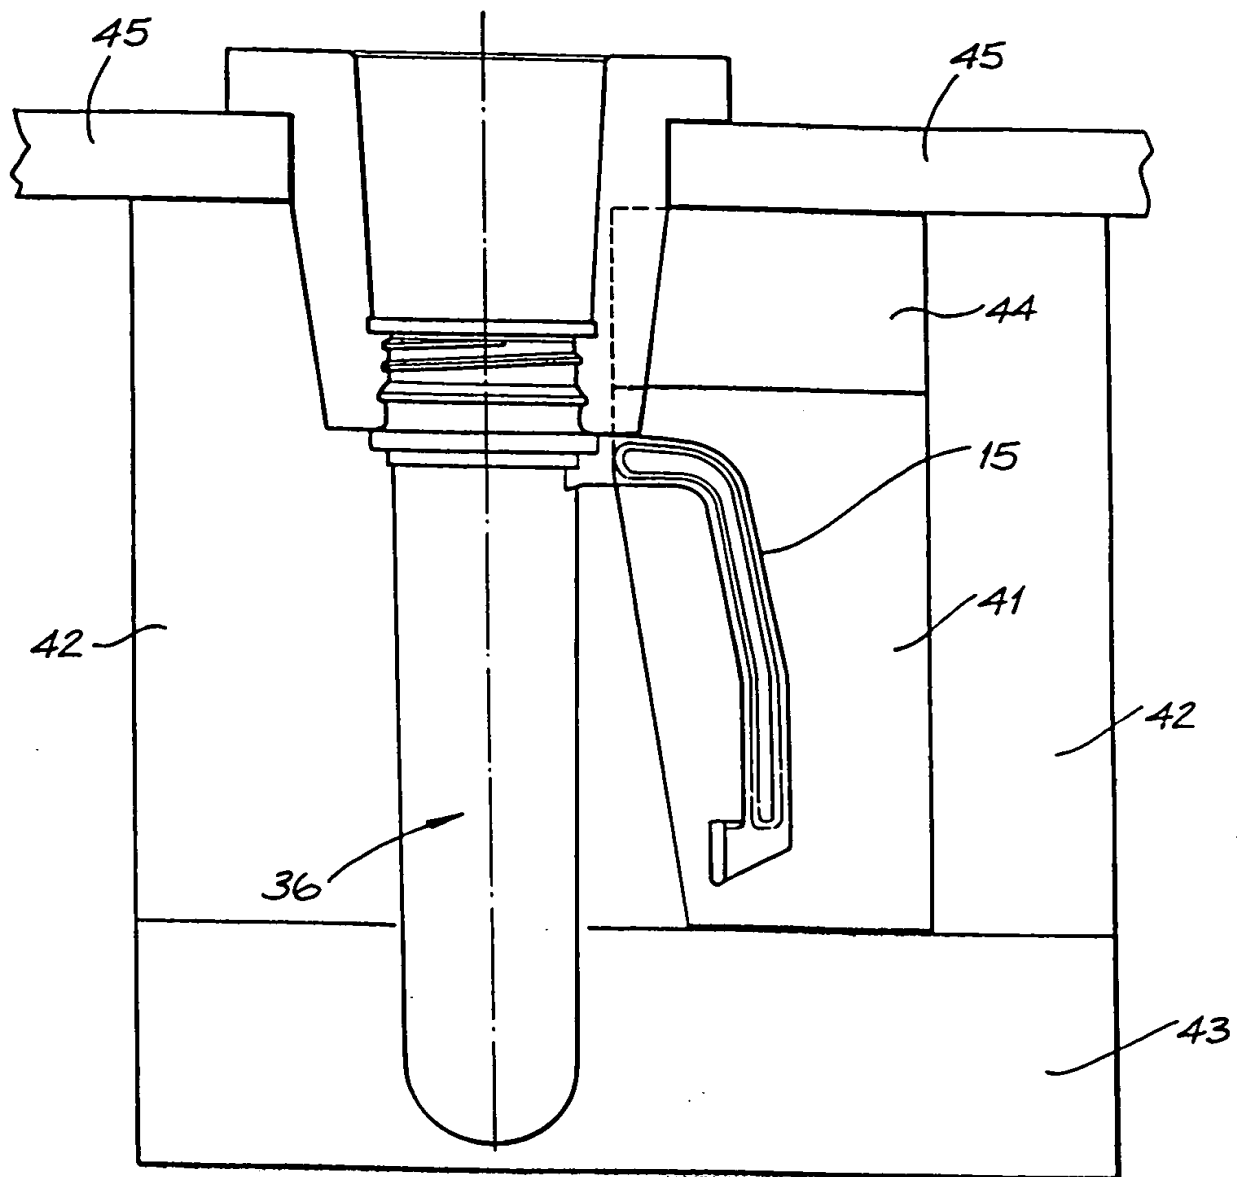


FIG. 8

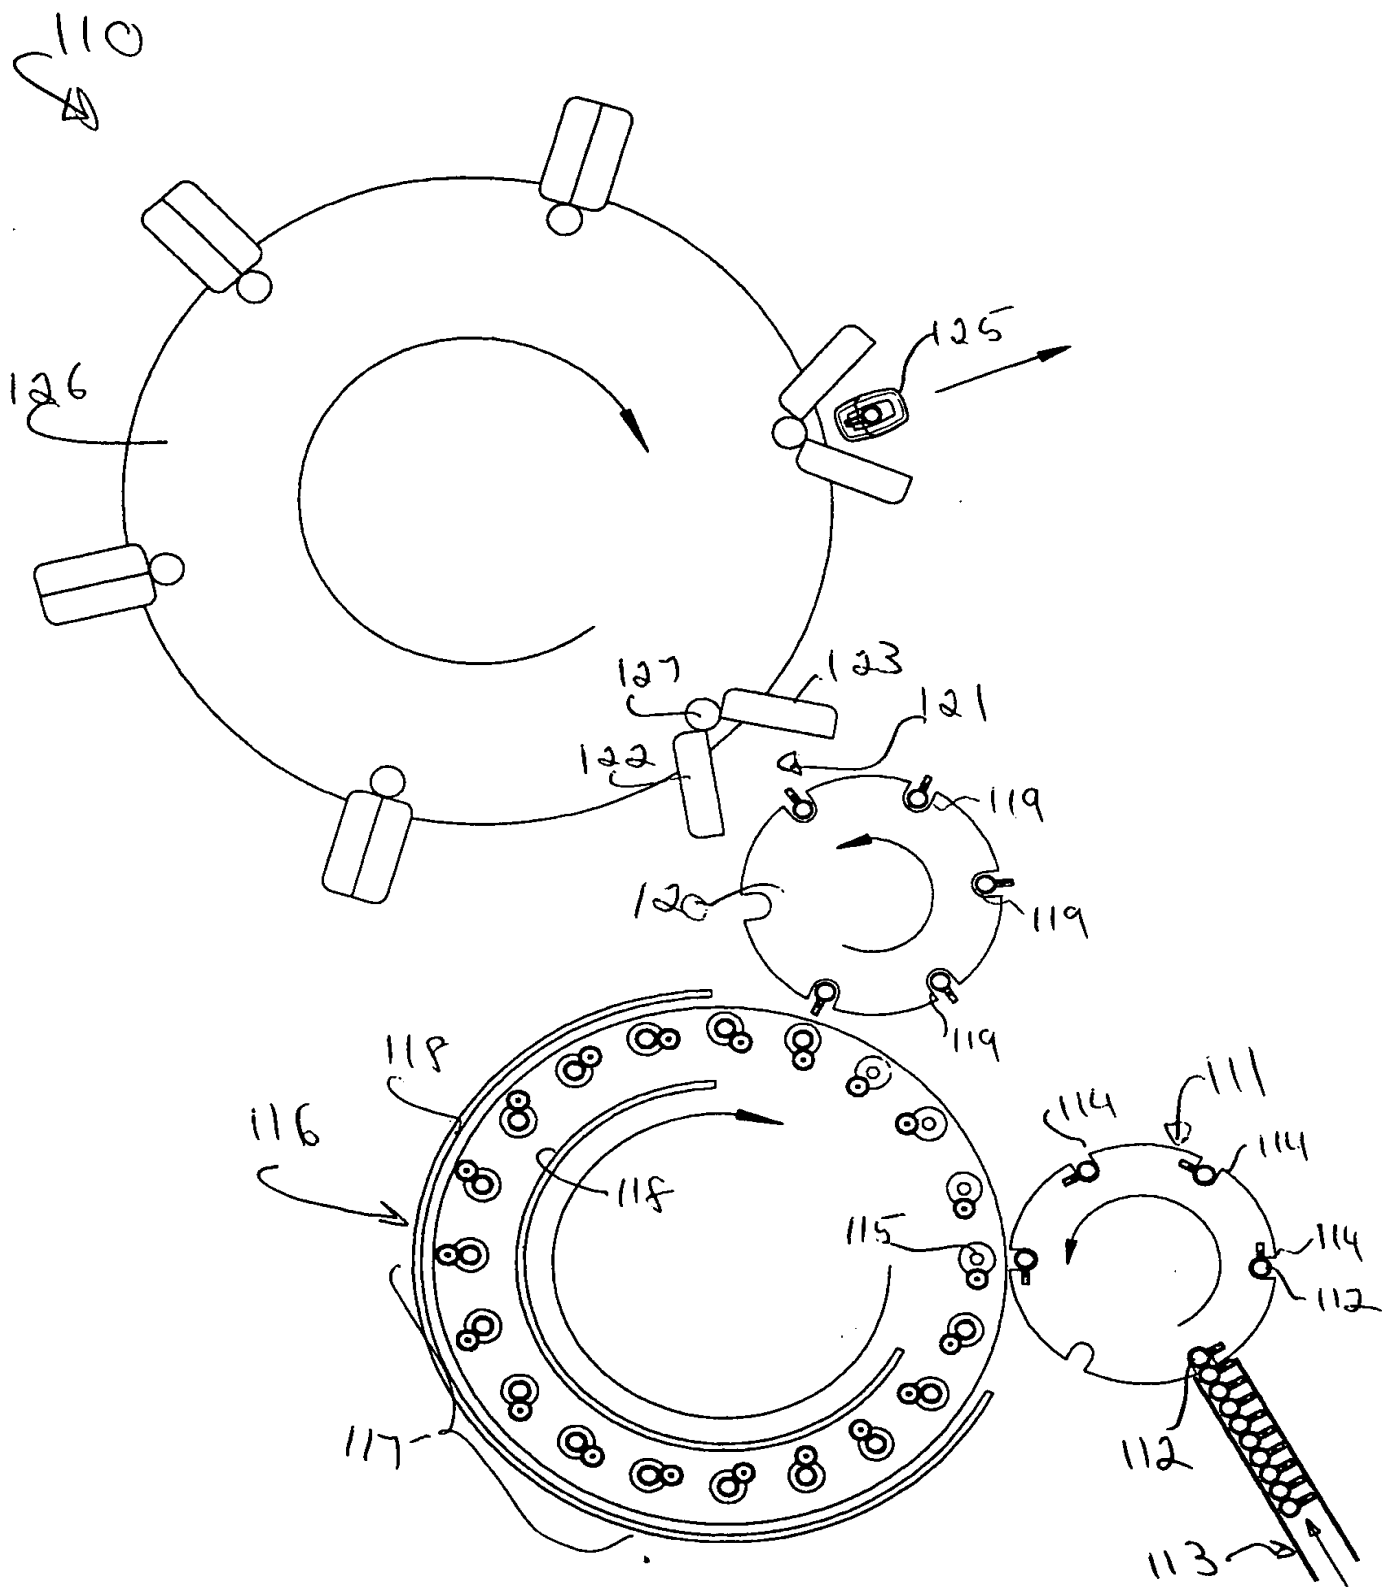


Fig 9

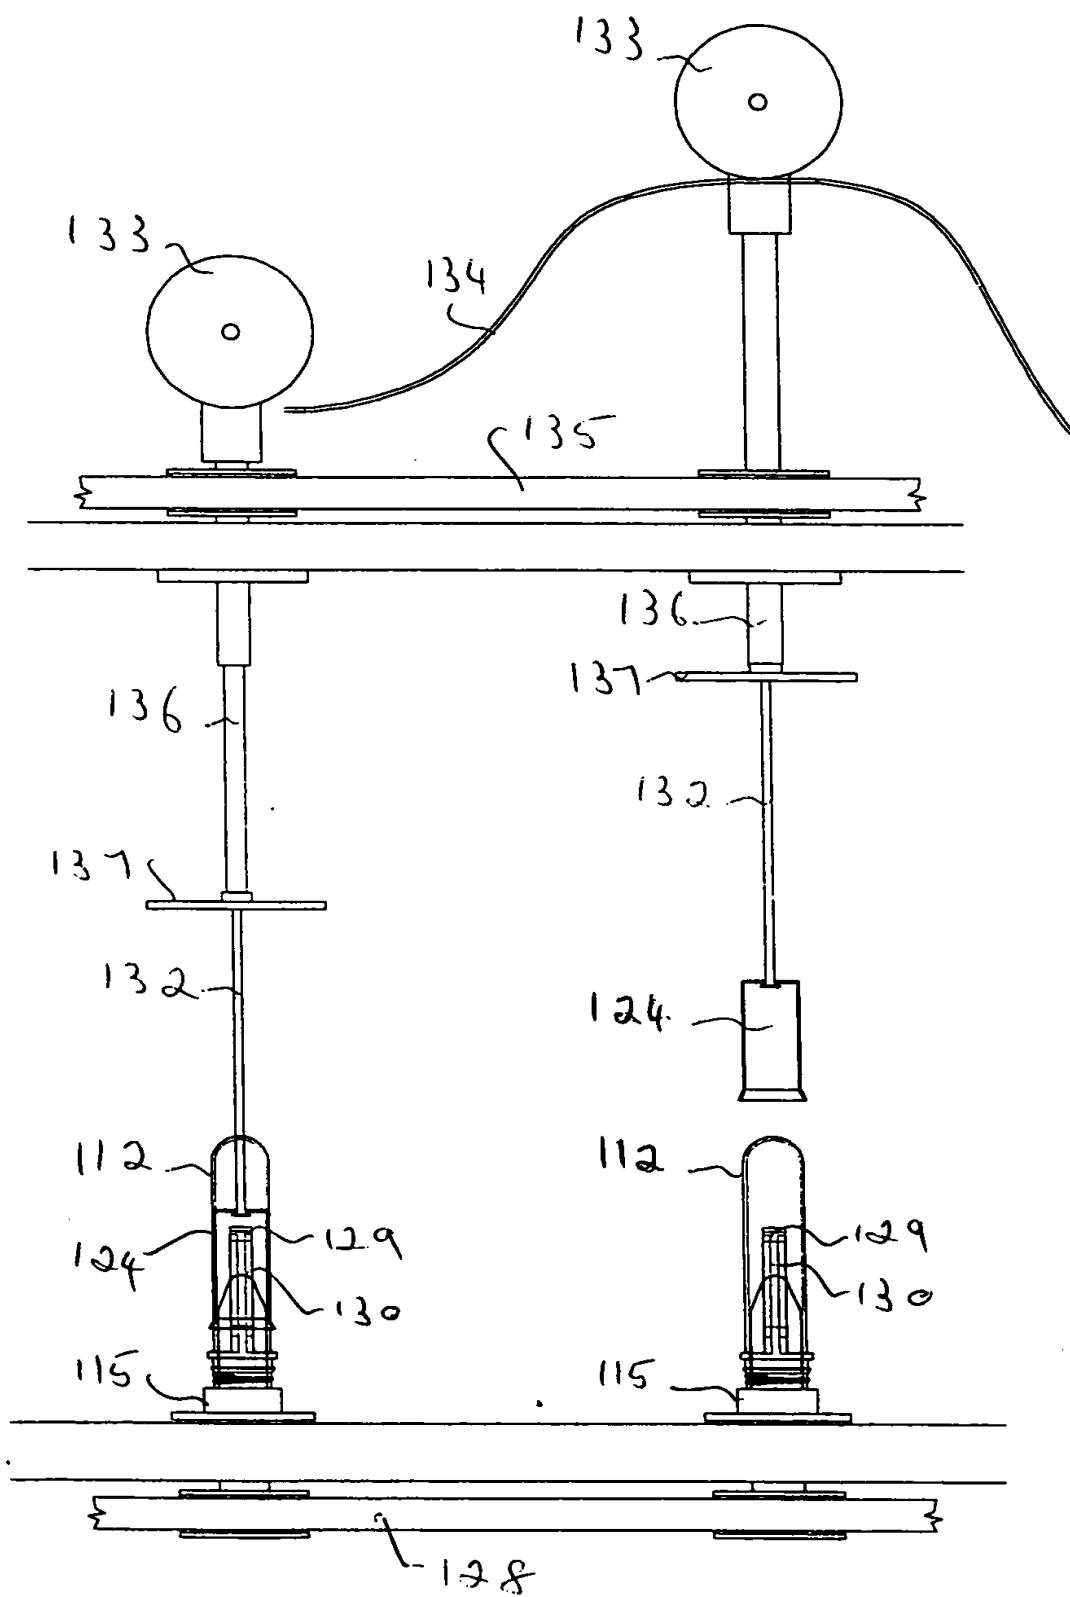


Fig 10

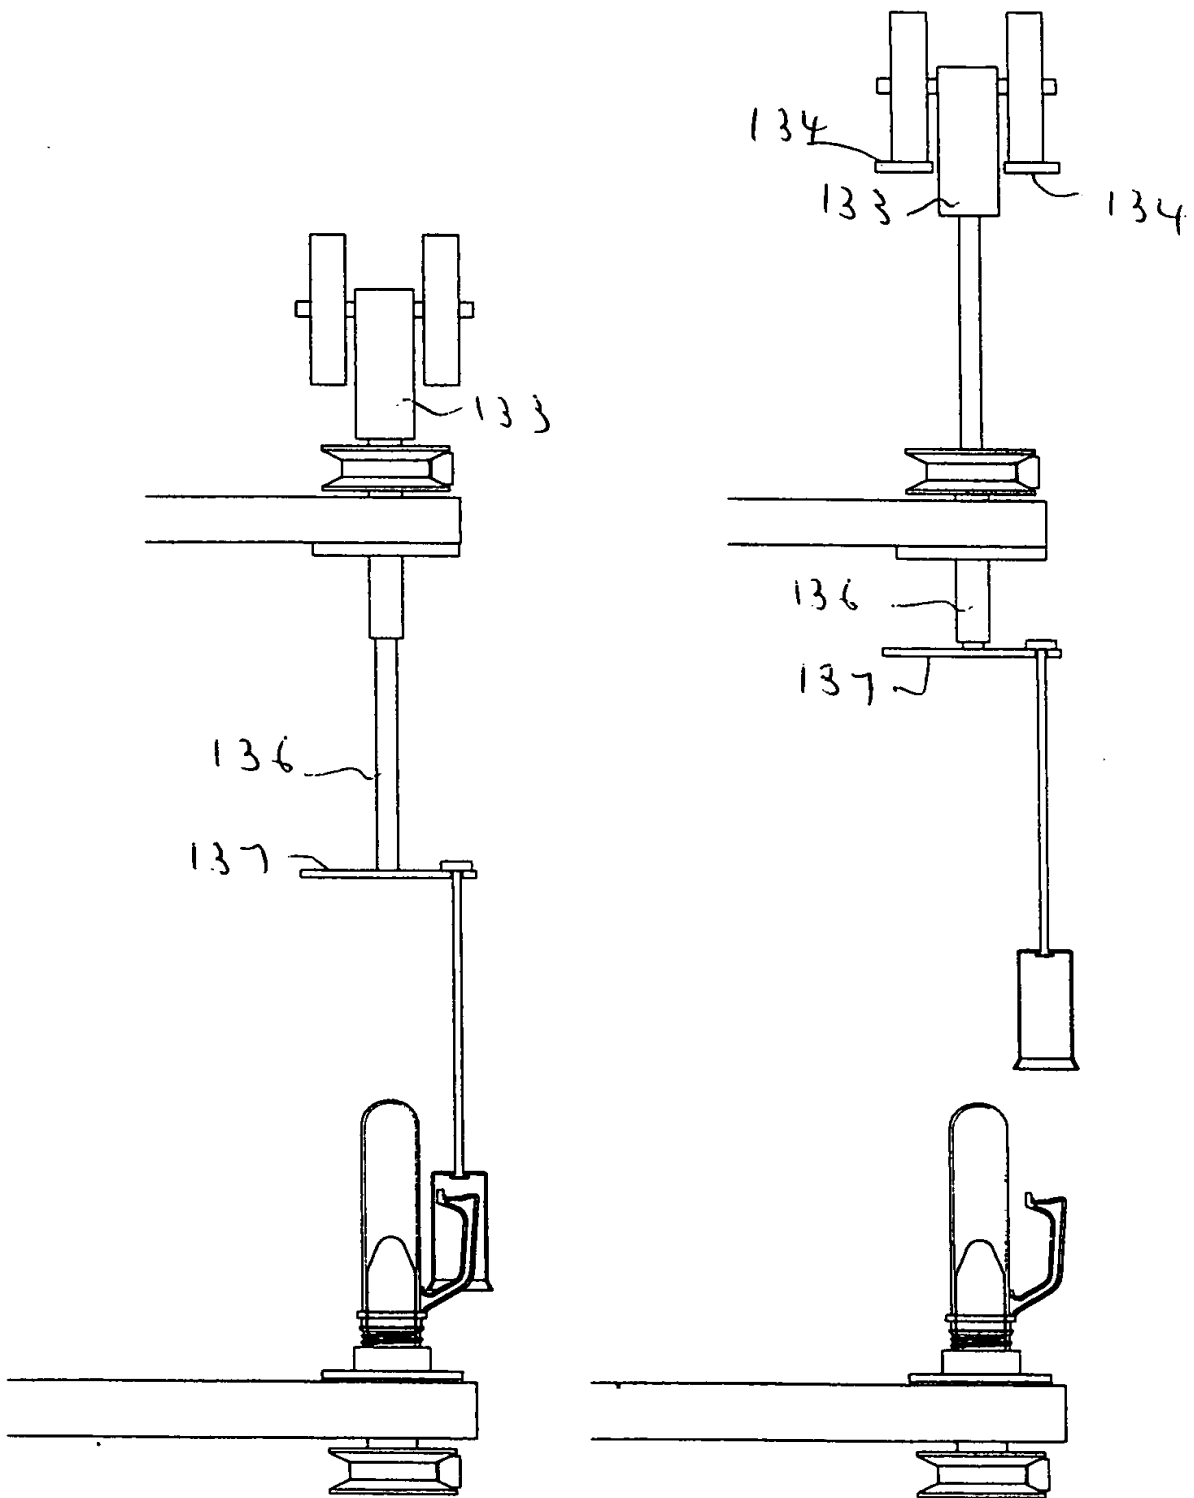


Fig 11

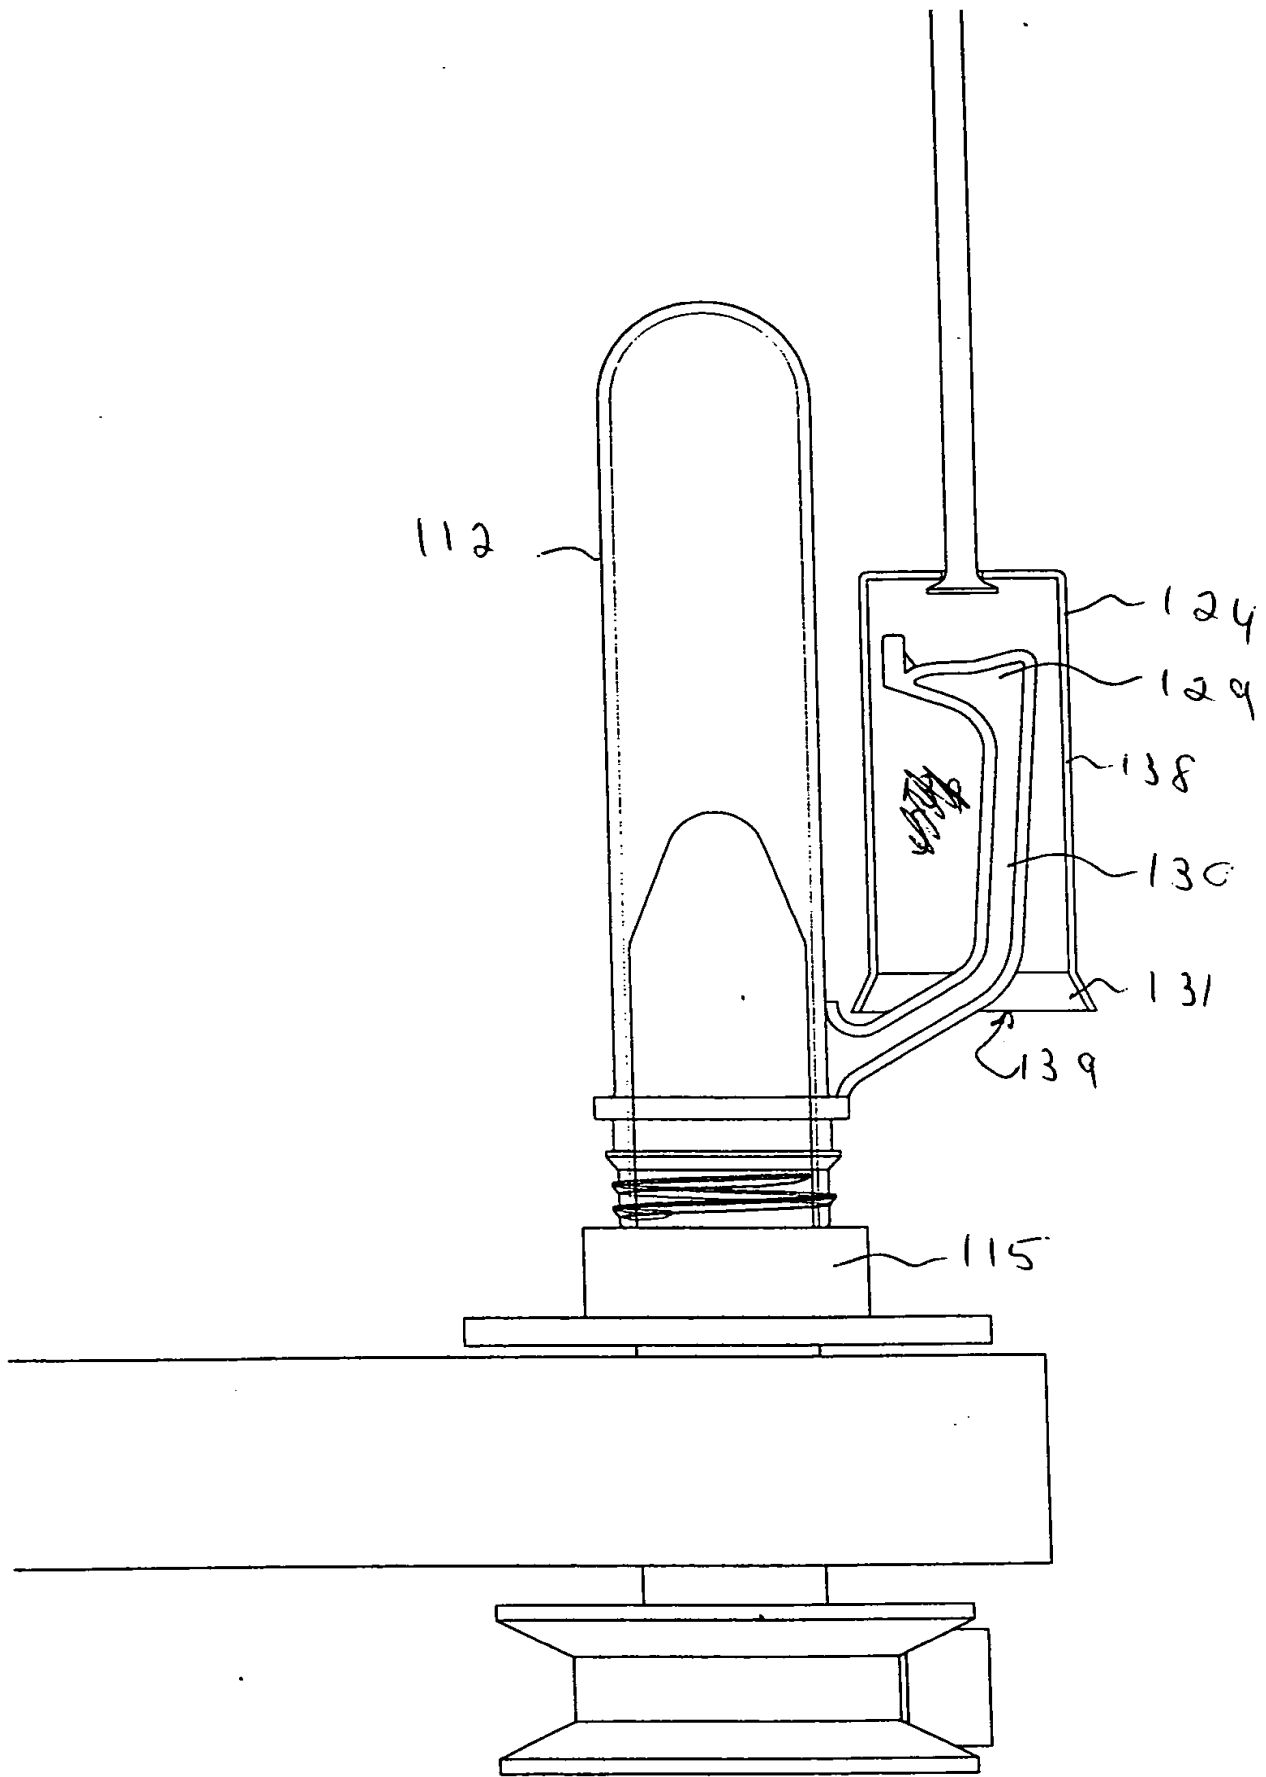


Fig 12

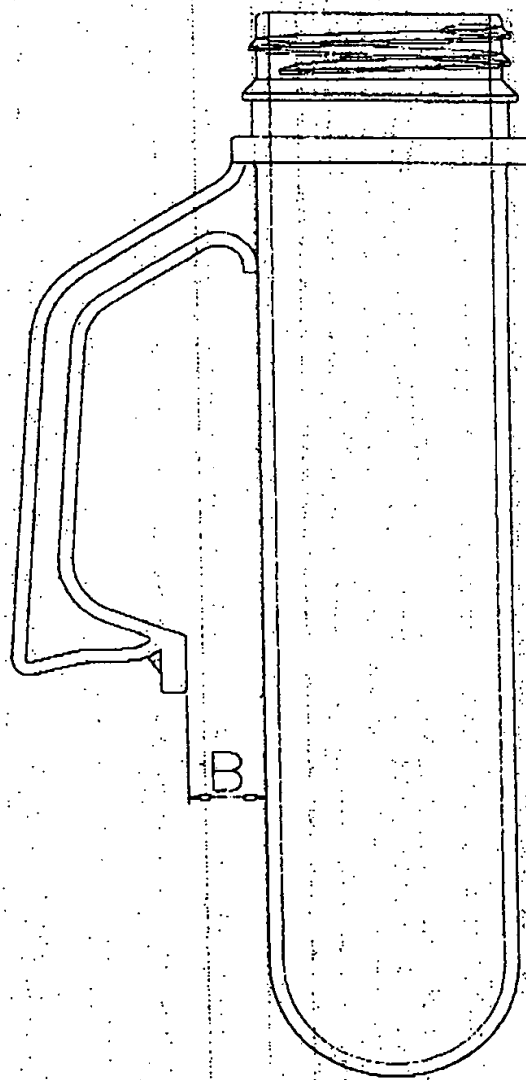
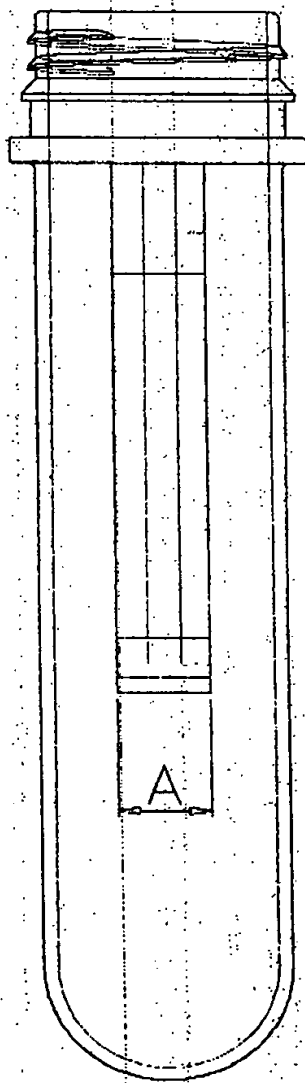


Fig 13

~~Fig 13~~

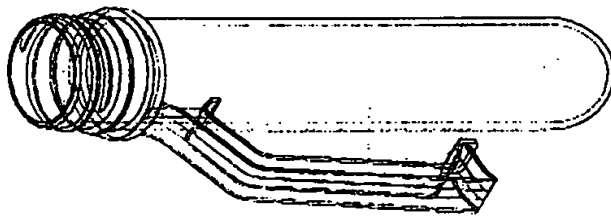


Fig. 14

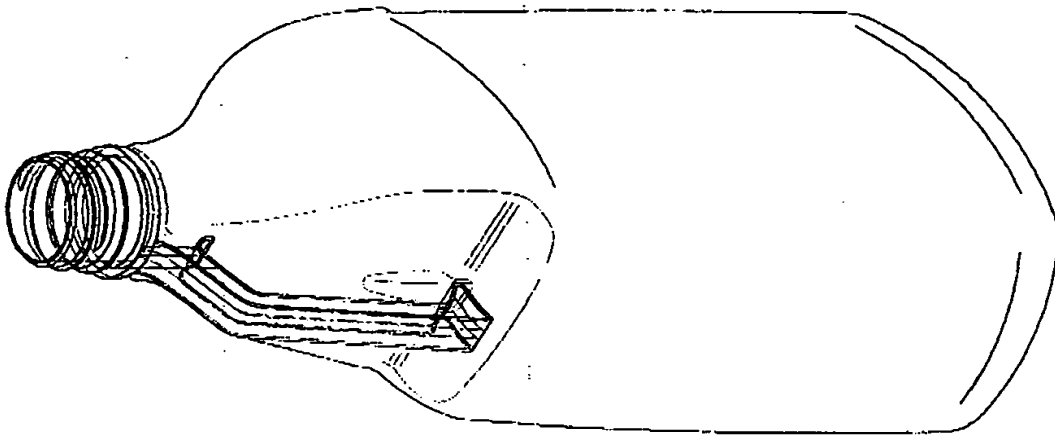


Fig. 15



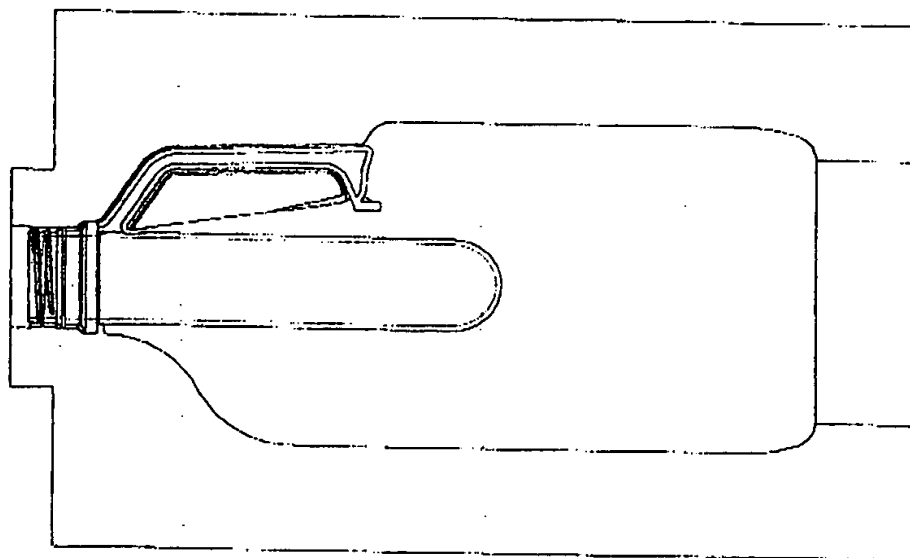


Fig. 17

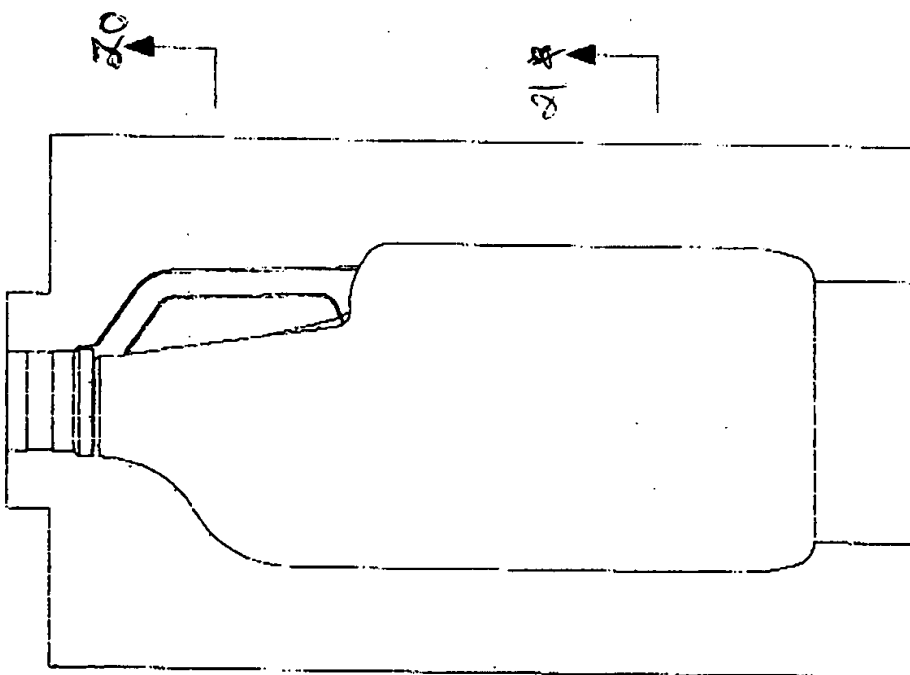


Fig. 16

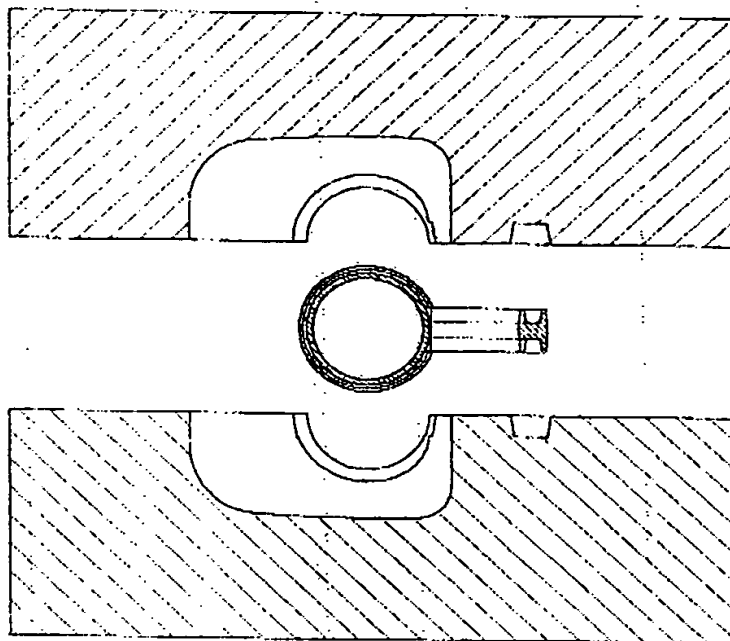


Fig. 18

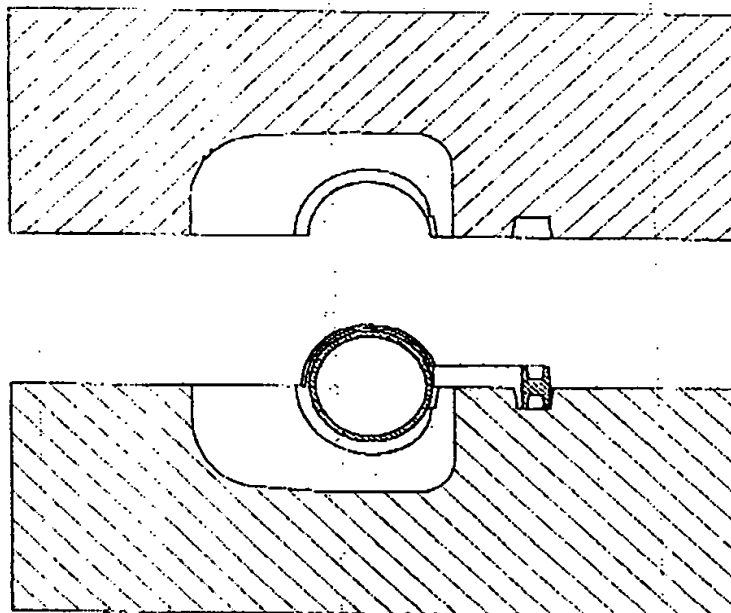


Fig. 19

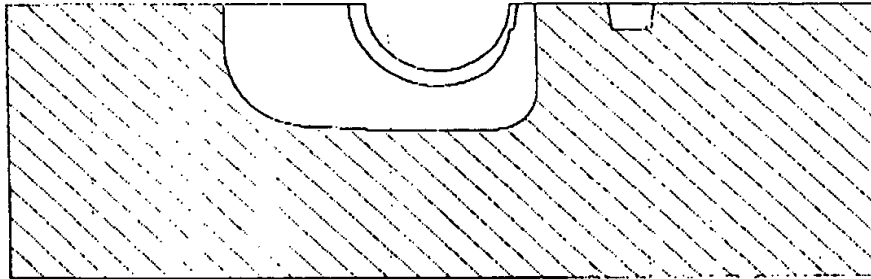


Fig. 20

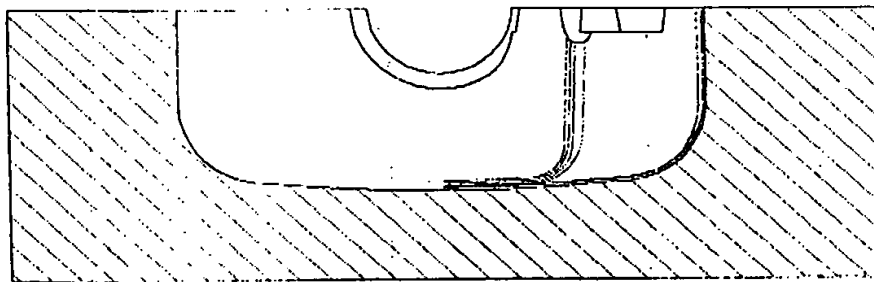


Fig. 21

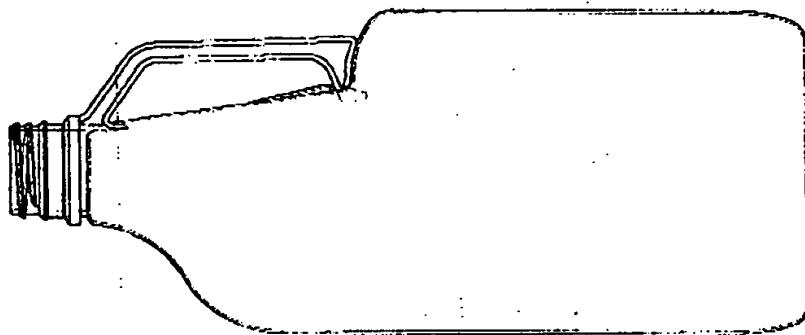


Fig. 22

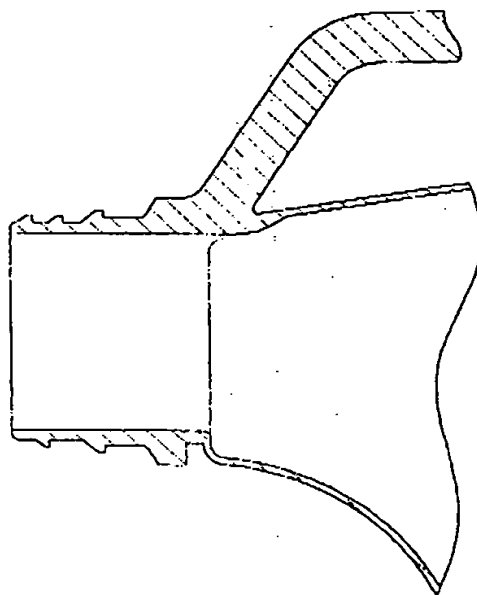


Fig. 23

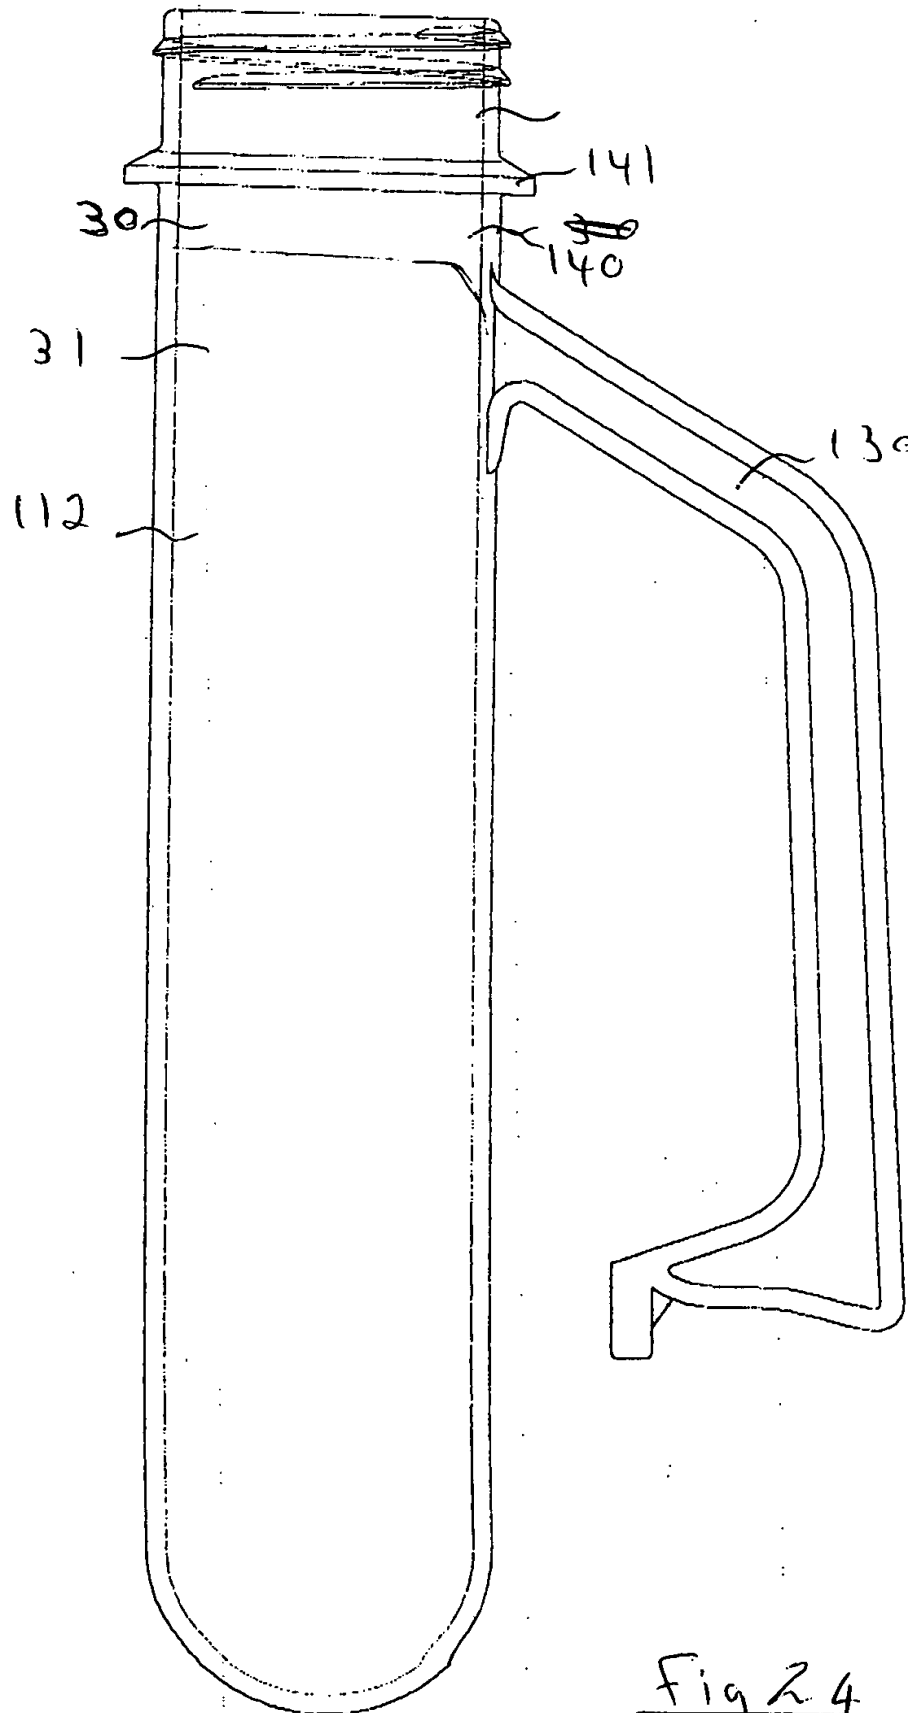


Fig 24

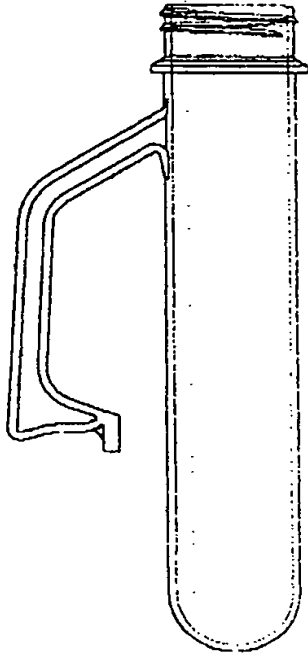


Fig. 25

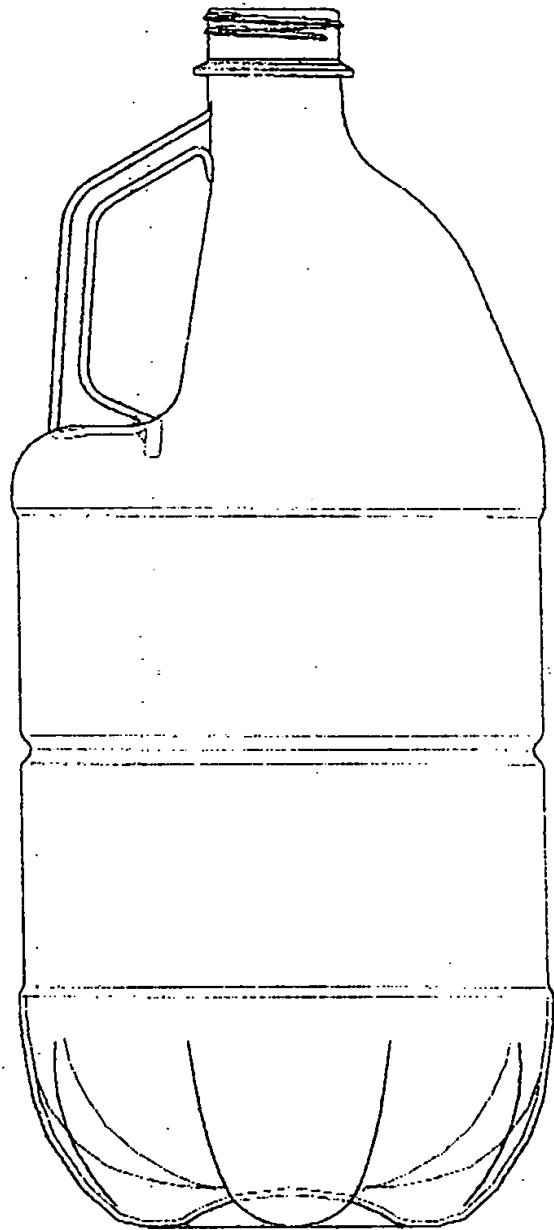


Fig. 26

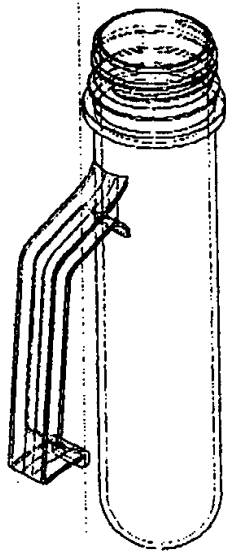


fig 27

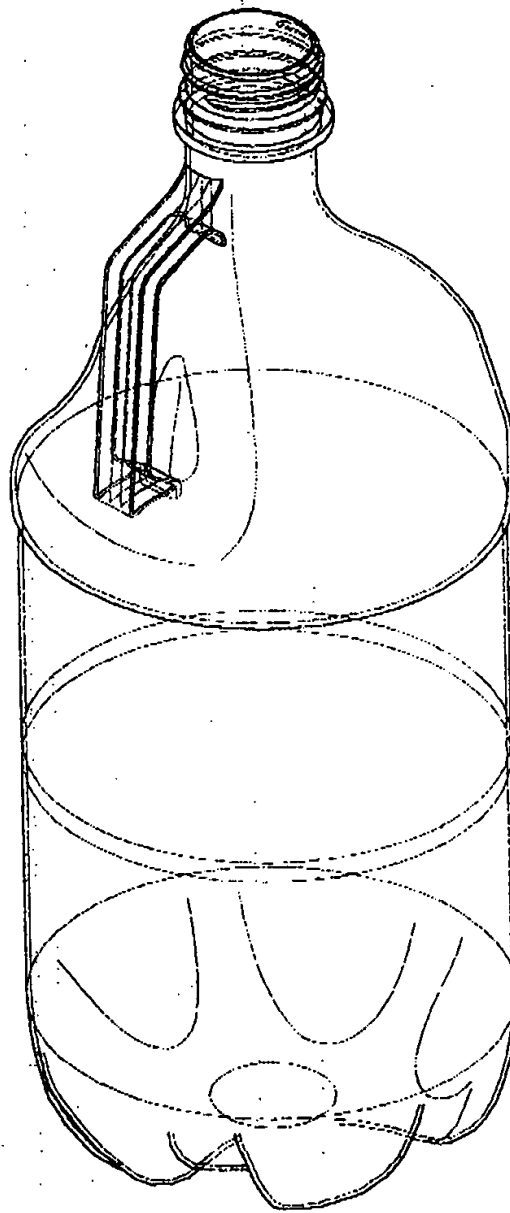


Fig. 28

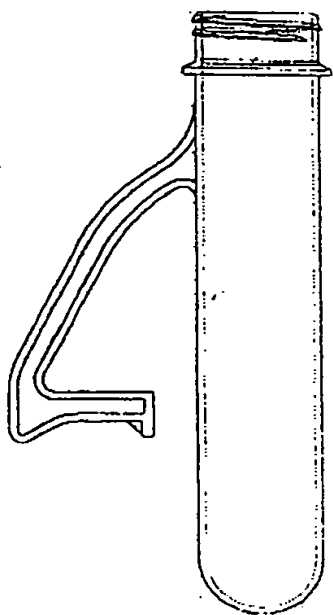


fig 29

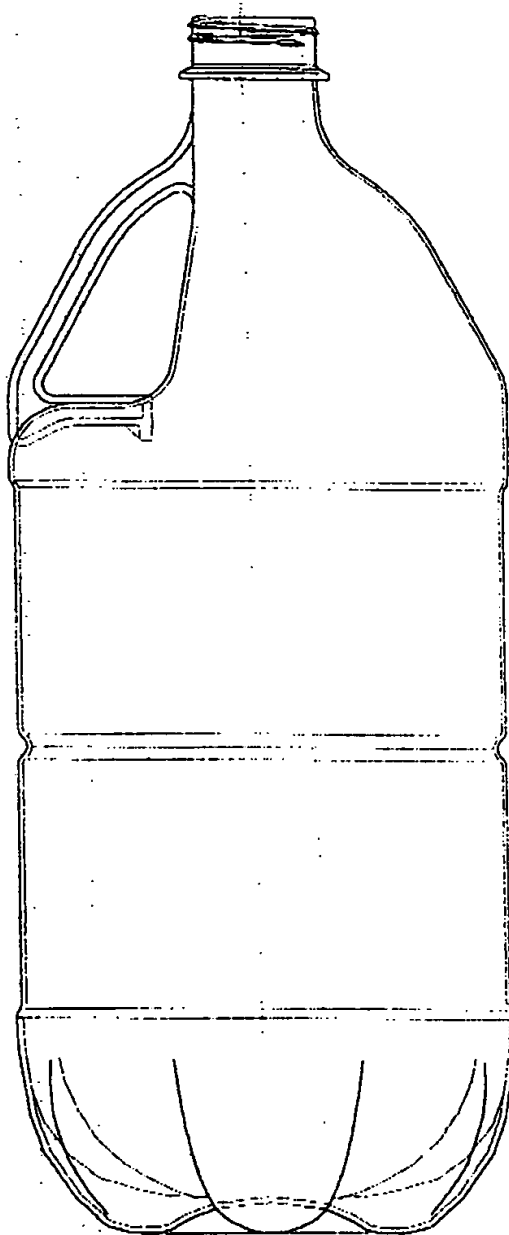


Fig. 30



Fig. 31

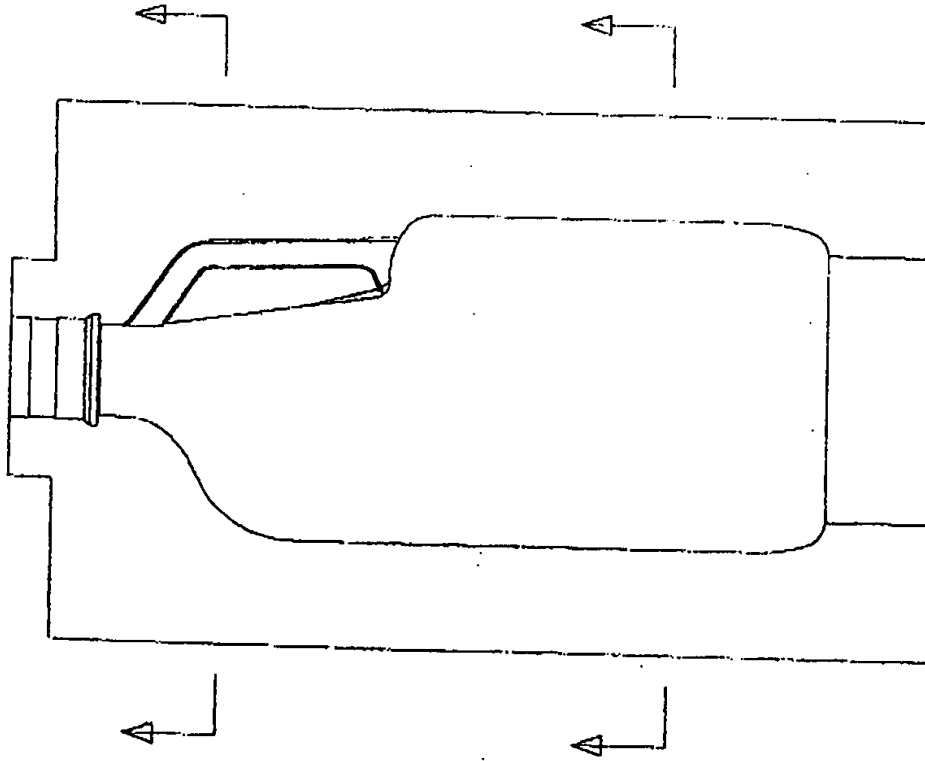
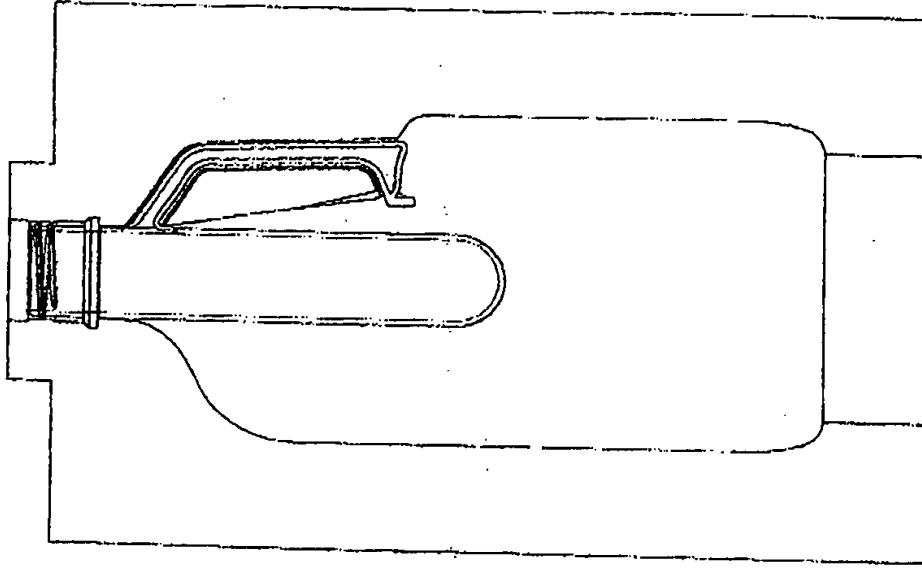


Fig. 32



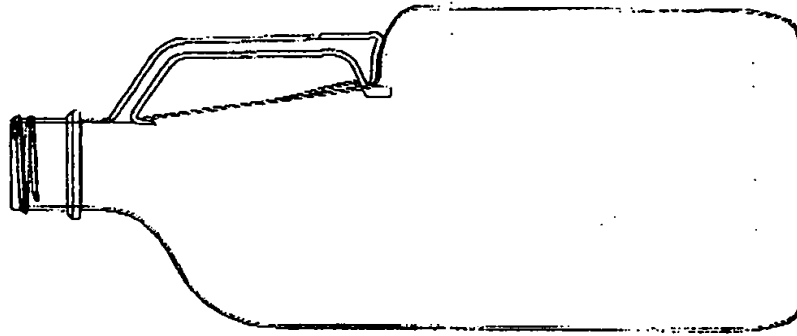


Fig. 33

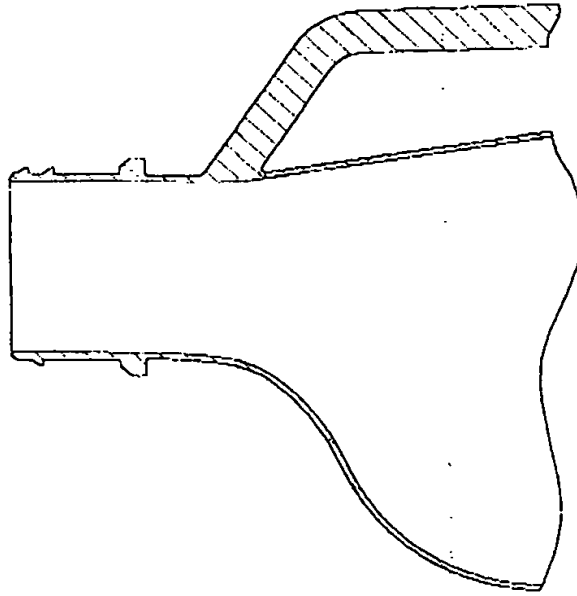


Fig. 34